


Part number

PEW 6333 PP



Wall-mounting socket outlet, PLUSO series, 2 poles + PE, 3 h (white), 63 A, 50 ÷ 250 V

Product description

| | |
|-----------------------|---|
| Product type | Socket Wall-mounting |
| Series | PEW...PP, PLUSO |
| N. of poles | 2 poles +  |
| Clock position | 3 |

Technical data

| | |
|--------------------------------|--------------|
| Current | 63 A |
| Voltage | > 50 ÷ 250 V |
| IP degree of protection | IP67 |

Further technical details

| | |
|---|-----------------|
| Weight | 1.260,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |

Material properties

| | |
|------------------------------|---|
| Colour | RAL 7035 grey, RAL 9010 white |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747158275 |
|-------------------|---------------|

Packaging Information

| | |
|------------------------------|----------------------|
| Packaging length | 210,00 mm |
| Packaging height | 135,00 mm |
| Packaging width | 280,00 mm |
| Packaging weight | 1,47 kg |
| Packaging volume | 7,94 dm ³ |
| Packaging description | Carton box |
| Packaging quantity | 1 Pcs |
| Packaging EAN code | 8015747244282 |


Part number

PEW 6333 PP




Catalogue drawings

(63A) PEW ... PP

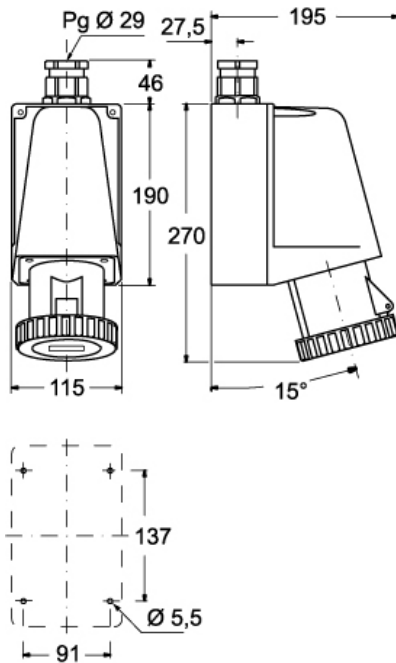

(125A) PEW ... PP

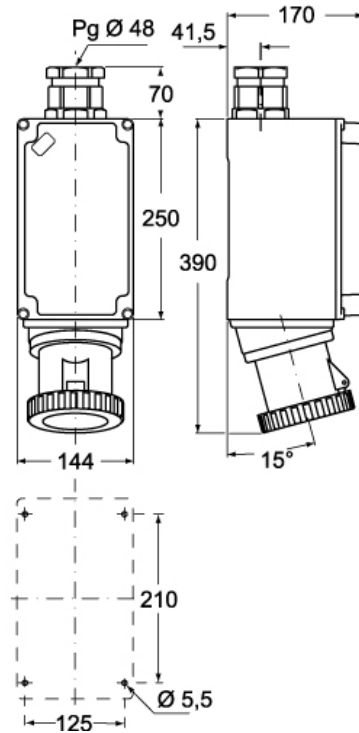

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage
- PE...PP types (IP44), spring lid, entry with threaded grommet (replaceable with a cable gland)
- PEW...PP types (IP67), spring lid with locking ring and gasket, entry with cable gland
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts, available on request for 16A and 32A (standard on 63A and 125A). For the code of products with nickel-plated contacts (socket holes, plug pins), add "N" to the pre-code of the corresponding standard product code; for example: PE becomes PEN and PEW becomes PEWN.
- 125A: with terminal block for the anchoring of incoming cables, already connected to socket
- IP44 and IP67 degrees of protection (EN 60529)