


Part number

# PEW 6373 PV



Mobile socket outlet, PLUSO series, 2 poles + PE, 7 h (black), 63 A, 480 ÷ 500 V

## Product description

<b>Product type</b>	Socket Mobile
<b>Series</b>	PEW...PV, PLUSO
<b>N. of poles</b>	2 poles + 
<b>Clock position</b>	7

## Technical data

<b>Current</b>	63 A
<b>Voltage</b>	480 ÷ 500 V
<b>IP degree of protection</b>	IP67

## Further technical details

<b>Operating temperature range (min, max)</b>	-25°C ... +40°C
---	-----------------

## Material properties

<b>Colour</b>	RAL 7035 grey, RAL 9005 black
---------------	-------------------------------

## Approvals / Standards

<b>Reference standard</b>	EN 60309-1 and -2
---------------------------	-------------------

## General ordering information

<b>EAN13 code</b>	8015747158411
-------------------	---------------


Part number

# PEW 6373 PV



## Catalogue drawings

(63 / 125A) PEW ... PV

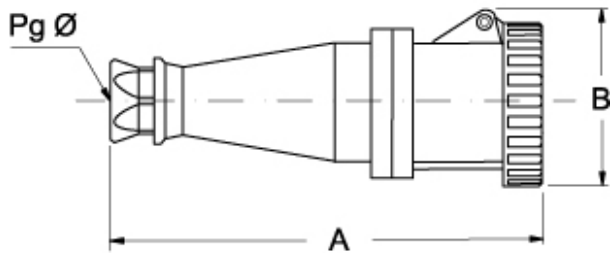

PEW ... PV	A	B	Pg Ø
<b>63A</b> 2P+⊕	277	108,5	36
3P+⊕	277	108,5	36
3P+N+⊕	277	108,5	36
<b>125A</b> 2P+⊕	324	120,5	2" gas
3P+⊕	324	120,5	2" gas
3P+N+⊕	324	120,5	2" gas

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- PE...PV types 16A and 32A (IP44), RAL 7035 grey enclosure, spring lid colour coded according to the operating voltage, entry with cable gland
- PEW...PV types 16A, 32A, 63A and 125A (IP66/IP67), RAL 7035 grey enclosure, spring lid with locking ring and gasket
- PEW...PV types 63A and 125A (IP67), cable anchoring collar incorporated in the insert
- Terminals with retained screws
- 63A, 125A: with pilot contact
- Nickel-plated contacts standard on 63A and 125A (on 16A and 32A only version PHW...PV)