


Part number

PHW 12564 PV



Mobile socket outlet, PLUSO HEAVY DUTY series, 3 poles + PE, 6 h (red), 125 A, 380 ÷ 415 V

Product description

Product type	Socket Mobile
Series	PHW...PV, PLUSO HEAVY DUTY
N. of poles	3 poles + 
Clock position	6

Technical data

Current	125 A
Voltage	380 ÷ 415 V
IP degree of protection	IP66 / IP67

Further technical details

Weight	0,00 g
Operating temperature range (min, max)	-40°C ... +100°C

Material properties

Colour	RAL 7012 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747144513
-------------------	---------------

Packaging Information

Packaging length	330,00 mm
Packaging height	170,00 mm
Packaging width	230,00 mm
Packaging volume	12,90 dm ³
Packaging description	Carton box
Packaging quantity	2 Pcs
Packaging EAN code	8015747274944
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747144650


Part number

PHW 12564 PV



Catalogue drawings

(63 / 125A) PHW ... PV

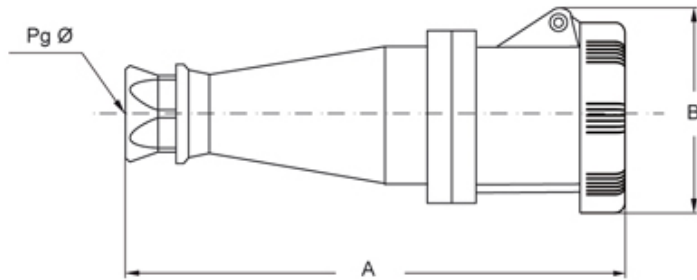

PHW...PV	A	B	Pg ø
63A 2P+⊕	277	108,5	36
3P+⊕	277	108,5	36
3P+N+⊕	277	108,5	36
125A 2P+⊕	324	120,5	2"gas
3P+⊕	324	120,5	2"gas
3P+N+⊕	324	120,5	2"gas

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Temperature range: from -40 °C to +100 °C
- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PHW...PV types (IP66/IP67), RAL 9005 black enclosure, locking ring with gasket colour coded according to the operating voltage, entry with cable gland
- Terminals with retained screws
- Stainless steel insert fixing screws
- Nickel-plated contacts as standard