


Part number

PHW 3265 SV



Mobile plug, PLUSO HEAVY DUTY series, 3 poles + N + PE, 6 h (red), 32 A, 380 ÷ 415 V, straight

Product description

Product type	Plug Mobile
Series	PHW...SV, PLUSO HEAVY DUTY
Connection type	Screw terminal connection
N. of poles	3 poles + N + 
Clock position	6
Specification	Straight

Technical data

Current	32 A
Voltage	380 ÷ 415 V
IP degree of protection	IP66 / IP67
Further technical details	
Weight	285,00 g
Operating temperature range (min, max)	-40°C ... +100°C

Material properties

Colour	RAL 7012 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747083812
-------------------	---------------

Packaging Information

Packaging length	330,00 mm
Packaging height	175,00 mm
Packaging width	295,00 mm
Packaging weight	3,02 kg
Packaging volume	17,04 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747085410


Part number

PHW 3265 SV



Catalogue drawings

(16 / 32A) PHW ... SV

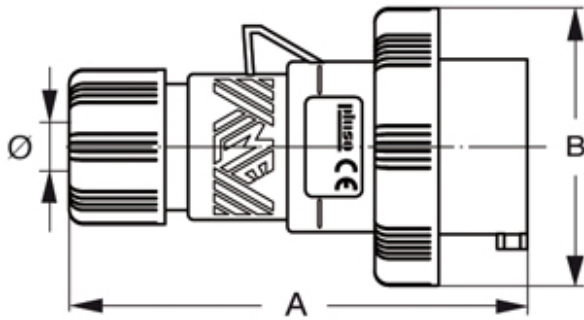

PHW...SV	A	B	Ø min	Ø max
16A 2P+⊕	129	70	7	16
3P+⊕	129	77	7	16
3P+N+⊕	129	86	8	24
32A 2P+⊕	150	92	8	24
3P+⊕	150	92	8	24
3P+N+⊕	150	100	8	24

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Temperature range: from -40 °C to +100 °C
- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PHW...SV types (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 9005 black enclosure, locking ring with gasket colour coded according to the operating voltage
- Terminals with retained screws
- Stainless steel insert fixing screws
- Nickel-plated contacts as standard