


Part number

# PK 12533 LL



Socket-outlet with circuit breaker and electrical interlock, PK series, 2 poles + PE, 3 h (white), 125 A, 50 ÷ 250 V

#### Product description

<b>Product type</b>	Socket-outlet with circuit breaker and electrical interlock
<b>Series</b>	PK..LL
<b>N. of poles</b>	2 poles + 
<b>Clock position</b>	3

#### Technical data

<b>Current</b>	125 A
<b>Voltage</b>	> 50 ÷ 250 V
<b>IP degree of protection</b>	IP55

#### Further technical details

<b>Weight</b>	10,00 g
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C
<b>IK rating (impact degree of protection)</b>	IK10

#### Material properties

<b>Colour</b>	RAL 7035 grey, RAL 9010 white
<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>China RoHs - EFUP</b>	50
<b>REACH SVHC substances</b>	Yes Lead
<b>SCIP number</b>	B8a45cd9-11ac-439d-af4a-e0be7dd4d115

#### Approvals / Standards

<b>Reference standard</b>	EN 60309-1, -2 e -4
---------------------------	---------------------

#### General ordering information

<b>EAN13 code</b>	8015747079181
-------------------	---------------

#### Packaging Information


<b>Packaging length</b>	570,00 mm
<b>Packaging height</b>	200,00 mm
<b>Packaging width</b>	265,00 mm
<b>Packaging volume</b>	30,21 dm <sup>3</sup>
<b>Packaging description</b>	Carton box
<b>Packaging quantity</b>	1 Pcs
<b>Packaging EAN code</b>	8015747079198

Part number

# PK 12533 LL



Catalogue drawings

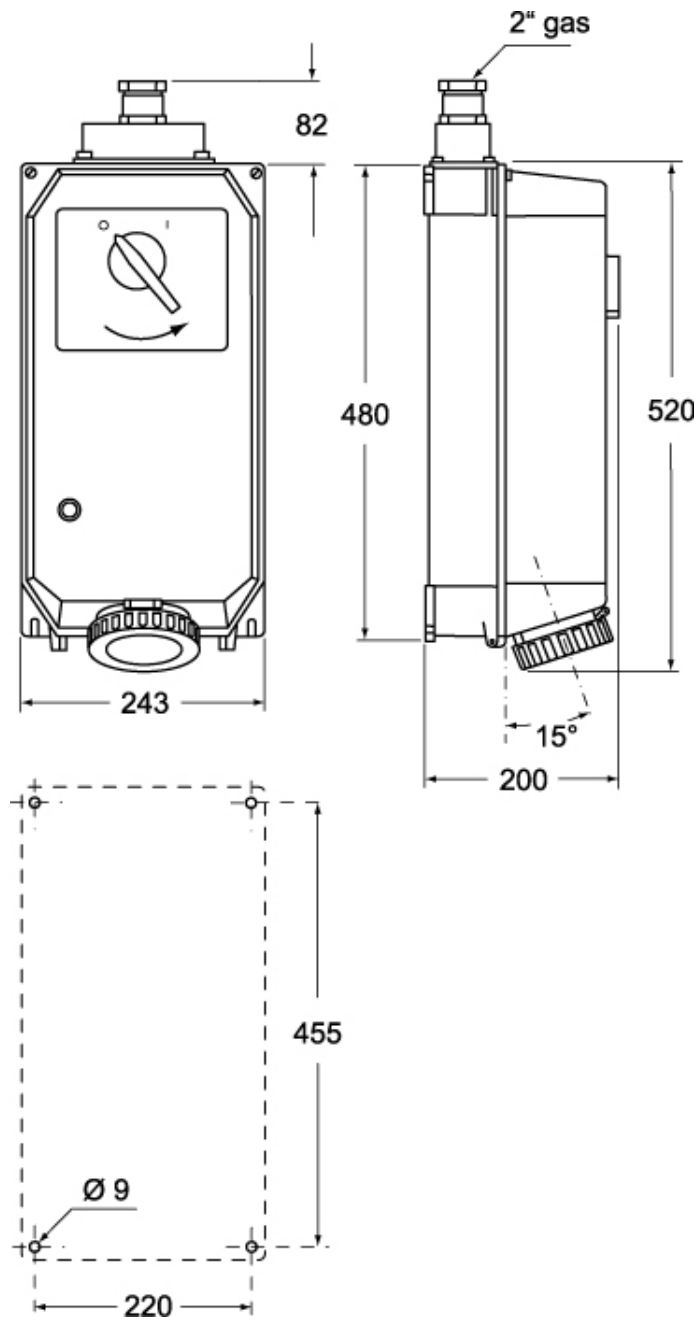

## Notes

Dimensions shown in mm are not binding and may be changed without notice.