

Part number

PK 12564 PB5



Interlocked switched socket-outlet, PK series,
3 poles + PE, 6 h (red), 125 A, 380 ÷ 415 V,
NH00 fuse carrier

Product description	
Product type	Interlocked switched socket-outlet
Series	PK..PB5
N. of poles	3 poles +
Clock position	6
Specification	NH00 fuse carrier
Technical data	
Current	125 A
Voltage	380 ÷ 415 V
IP degree of protection	IP55
Further technical details	
Weight	9.000,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747079341
Packaging Information	
Packaging length	570,00 mm
Packaging height	200,00 mm
Packaging width	265,00 mm
Packaging weight	9,70 kg
Packaging volume	30,21 dm ³
Packaging description	Carton box
Packaging quantity	1 Pcs
Packaging EAN code	8015747079358
Sub-packaging length	113,00 mm
Sub-packaging height	36,00 mm
Sub-packaging width	180,00 mm
Sub-packaging volume	0,73 dm ³

Part number

PK 12564 PB5



Catalogue drawings

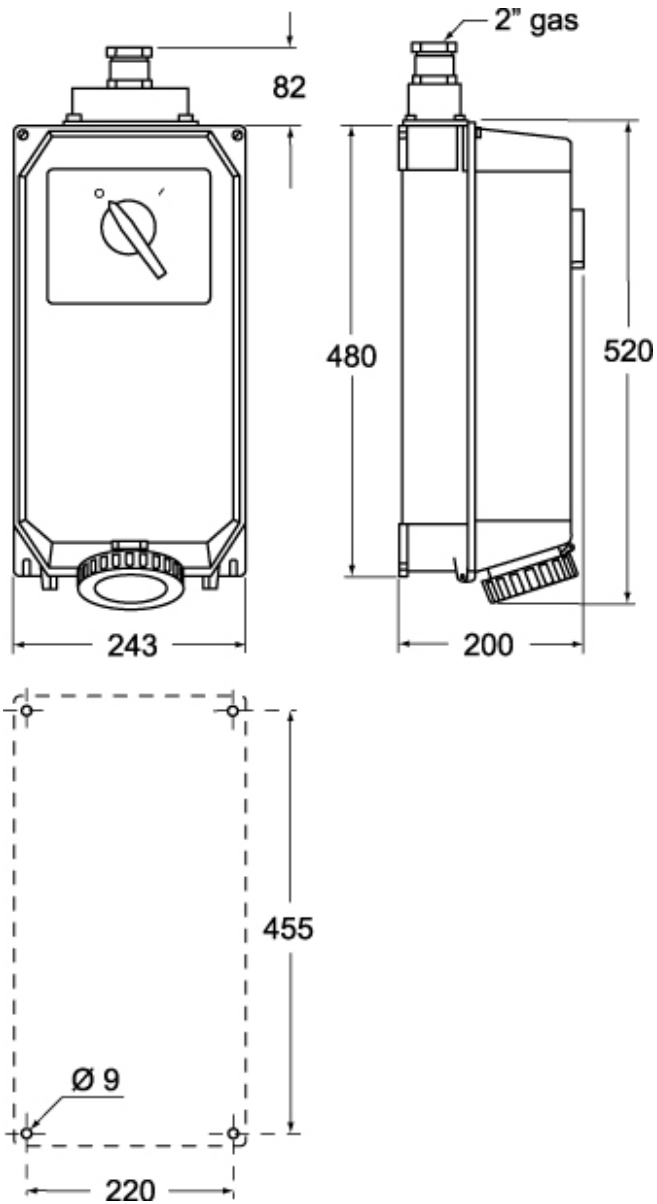

Notes

Dimensions shown in mm are not binding and may be changed without notice.