


Part number

PK 12565 PE5



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 6 h (red), 125 A, 346 ÷ 415
V


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 3000 red
Series	PK..PB5		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + N + 	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Clock position	6	China RoHs - EFUP	50
Technical data		REACH SVHC substances	Yes Lead
Current	125 A	SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Voltage	346 - 415 V	Approvals / Standards	
IP degree of protection	IP55	Reference standard	EN 60309-1, -2 e -4
Further technical details		General ordering information	
Weight	9.100,00 g	EAN13 code	8015747079365
Operating temperature range (min, max)	-25°C ... +40°C	Packaging Information	
IK rating (impact degree of protection)	IK10	Packaging length	570,00 mm
		Packaging height	200,00 mm
		Packaging width	265,00 mm
		Packaging weight	9,40 kg
		Packaging volume	30,21 dm ³
		Packaging description	Carton box
		Packaging quantity	1 Pcs
		Packaging EAN code	8015747079372
		Sub-packaging length	113,00 mm
		Sub-packaging height	36,00 mm
		Sub-packaging width	180,00 mm
		Sub-packaging volume	0,73 dm ³

Part number

PK 12565 PE5



Catalogue drawings

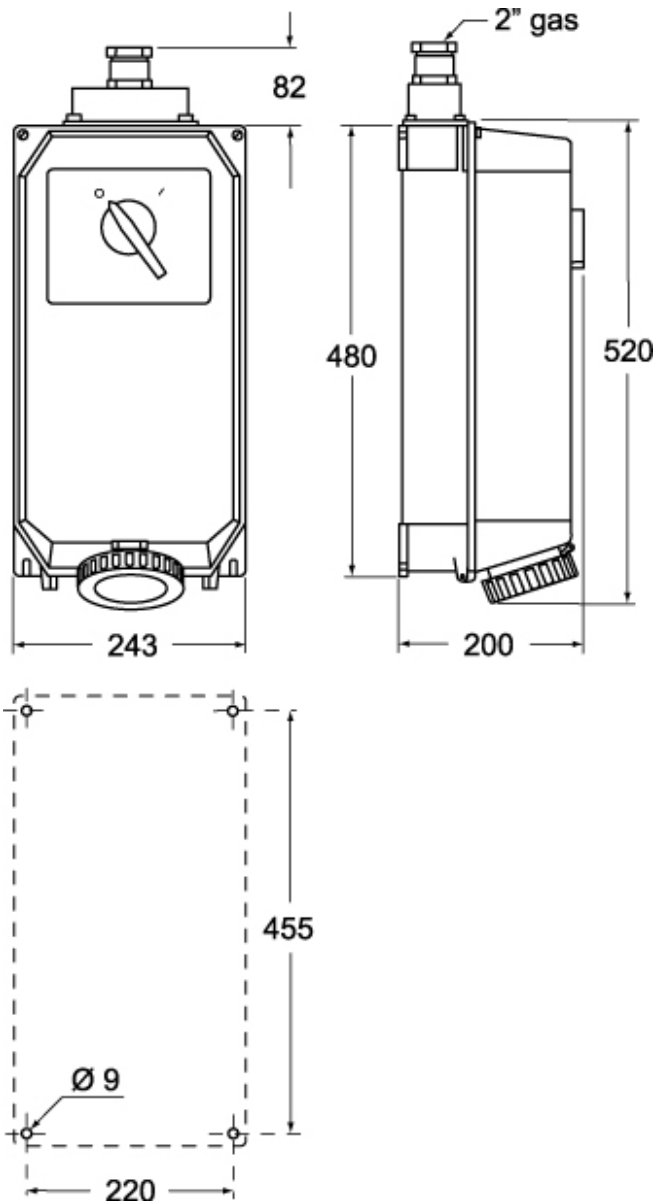

Notes

Dimensions shown in mm are not binding and may be changed without notice.