

Part number

PK 12574 PB5



Interlocked switched socket-outlet, PK series,
3 poles + PE, 7 h (black), 125 A, 480 ÷ 500 V,
NH00 fuse carrier


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 9005 black
Series	PK..PB5		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles +	RoHs conformity	60
Clock position	7	China RoHs - EFUP	50
Specification	NH00 fuse carrier	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Current	125 A	Approvals / Standards	
Voltage	480 ÷ 500 V	Reference standard	EN 60309-1, -2 e -4
IP degree of protection	IP55	General ordering information	
Further technical details		EAN13 code	8015747079488
Weight	9.000,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Packaging length	570,00 mm
IK rating (impact degree of protection)	IK10	Packaging height	200,00 mm
		Packaging width	265,00 mm
		Packaging weight	9,70 kg
		Packaging volume	30,21 dm ³
		Packaging description	Carton box
		Packaging quantity	1 Pcs
		Packaging EAN code	8015747079495
		Sub-packaging length	113,00 mm
		Sub-packaging height	36,00 mm
		Sub-packaging width	180,00 mm
		Sub-packaging volume	0,73 dm ³

Part number

PK 12574 PB5



Catalogue drawings

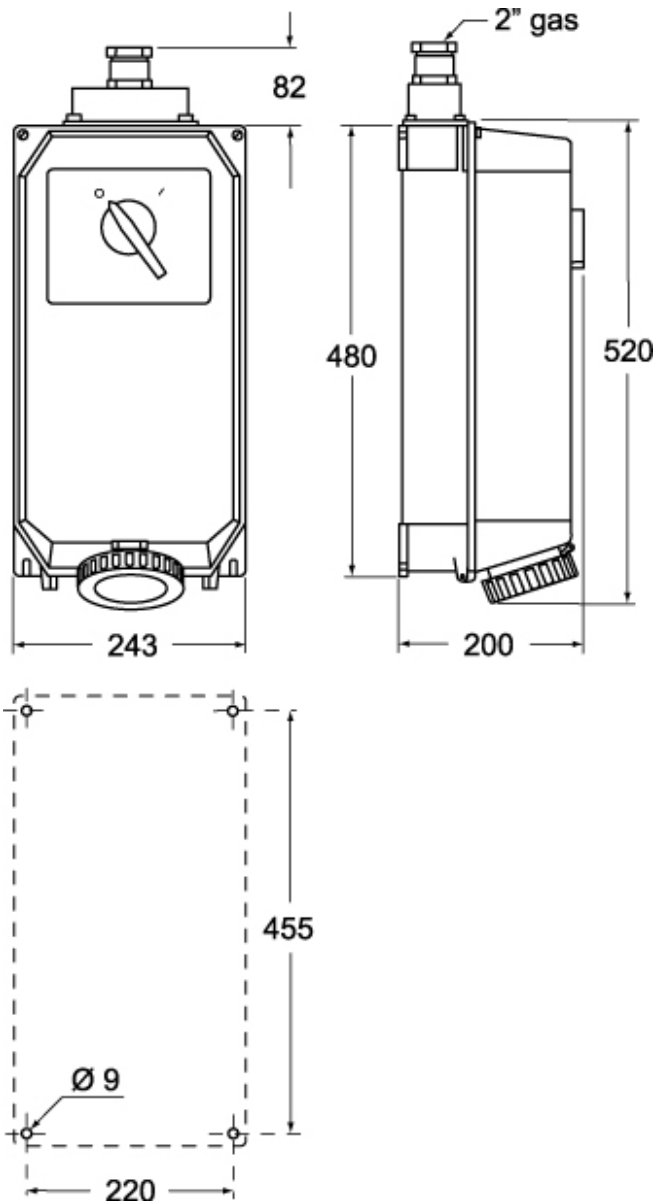

Notes

Dimensions shown in mm are not binding and may be changed without notice.