

Part number

PK 1663 PB5



Interlocked switched socket-outlet, PK series,
2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V,
E16 fuse carrier

Product description	
Product type	Interlocked switched socket-outlet
Series	PK..PB5
N. of poles	2 poles +
Clock position	6
Specification	E16 fuse carrier
Technical data	
Current	16 A
Voltage	200 ÷ 250 V
IP degree of protection	IP55
Further technical details	
Weight	1.657,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10



Material properties	
Colour	RAL 7035 grey, RAL 5015 blue
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747080170
Packaging Information	
Packaging weight	16,97 kg
Packaging volume	52,36 dm ³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747106221
Sub-packaging weight	1,89 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747080194

Part number

PK 1663 PB5



Catalogue drawings

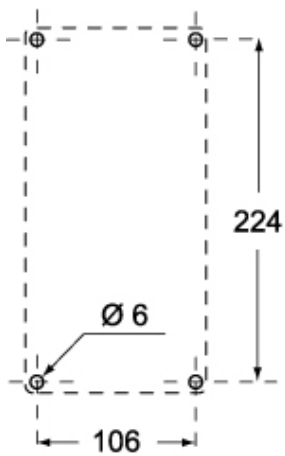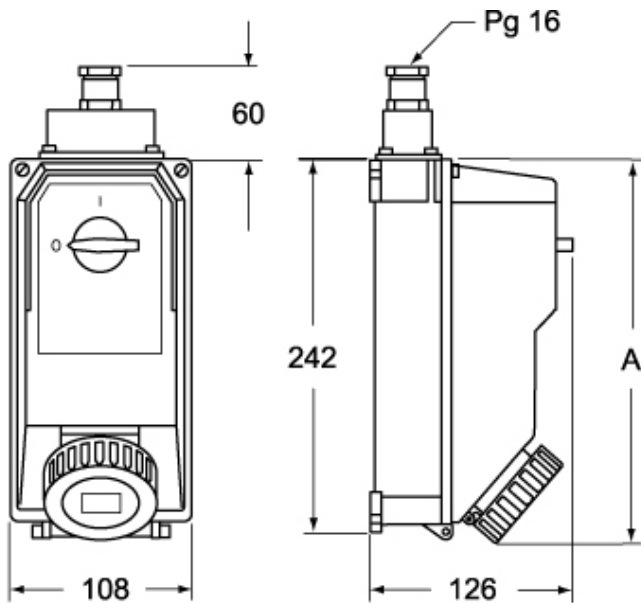

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270

Notes

Dimensions shown in mm are not binding and may be changed without notice.