


Part number

PK 1675 PB5



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 7 h (black), 16 A, 277/480 ÷
288/500 V, E16 fuse carrier

Product description

Product type	Interlocked switched socket-outlet
Series	PK..PB5
N. of poles	3 poles + N + 
Clock position	7
Specification	E16 fuse carrier

Technical data

Current	16 A
Voltage	277/480 ÷ 288/500 V
IP degree of protection	IP55

Further technical details

Weight	1.795,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7035 grey, RAL 9005 black
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information

EAN13 code	8015747080606
-------------------	---------------

Packaging Information


Sub-packaging length	285,00 mm
Sub-packaging height	130,00 mm
Sub-packaging width	130,00 mm
Sub-packaging weight	1,80 kg
Sub-packaging volume	4,82 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747080613

Part number

PK 1675 PB5



Catalogue drawings

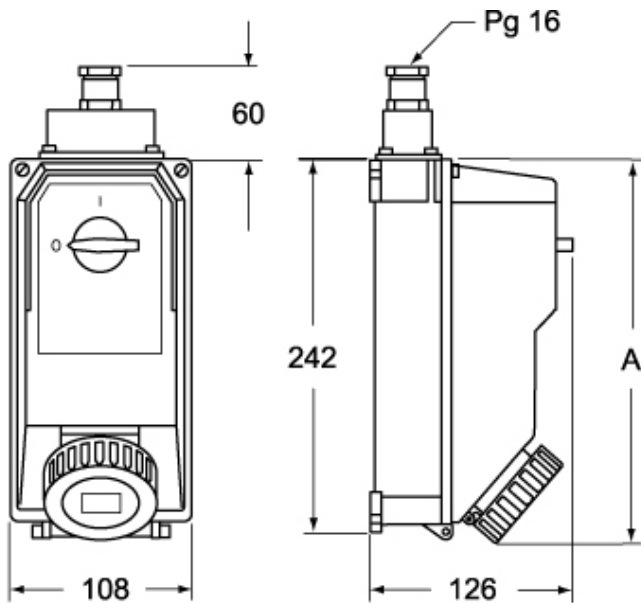

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270

Notes

Dimensions shown in mm are not binding and may be changed without notice.