

Part number

PK 3265 EB



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷
240/415 V, without fuse-carrier

Product description

Product type	Interlocked switched socket-outlet
Series	PK..EB
N. of poles	3 poles + N +
Clock position	6
Size	114x228 fixing plates FC xx41 TB
Cable entry	Pg29
Specification	Without fuse-carrier

Technical data

Current	32 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP44

Further technical details

Weight	1.330,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	F6799547-ab84-42f2-938f-233ba663766d

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
--------------------	---------------------

General ordering information

EAN13 code	8015747081566
------------	---------------

Packaging Information


Packaging length	535,00 mm
Packaging height	320,00 mm
Packaging width	325,00 mm
Packaging weight	12,06 kg
Packaging volume	55,64 dm ³
Packaging description	Carton box
Packaging quantity	8 Pcs
Packaging EAN code	8015747081573
Sub-packaging length	290,00 mm
Sub-packaging height	125,00 mm
Sub-packaging width	155,00 mm
Sub-packaging weight	1,51 kg
Sub-packaging volume	5,62 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747081580

Part number

PK 3265 EB



Catalogue drawings

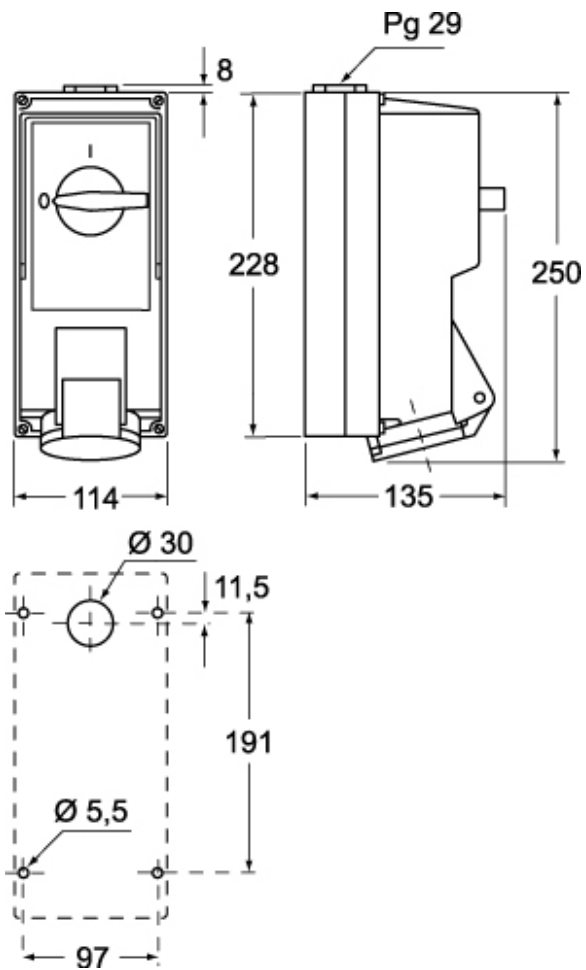

Notes

Dimensions shown in mm are not binding and may be changed without notice.