

Part number

# PK 6365 EB



Interlocked switched socket-outlet, PK series,  
3 poles + N + PE, 6 h (red), 63 A, 346 ÷ 415  
V, without fuse-carrier

| Product description                     |                                                                                                   |
|-----------------------------------------|---------------------------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                                |
| Series                                  | PK..EB                                                                                            |
| N. of poles                             | 3 poles + N +  |
| Clock position                          | 6                                                                                                 |
| Size                                    | 114x228 fixing plates FC xx41 TB                                                                  |
| Cable entry                             | Pg29                                                                                              |
| Specification                           | Without fuse-carrier                                                                              |
| Technical data                          |                                                                                                   |
| Current                                 | 63 A                                                                                              |
| Voltage                                 | 346 - 415 V                                                                                       |
| IP degree of protection                 | IP44                                                                                              |
| Further technical details               |                                                                                                   |
| Weight                                  | 1.850,00 g                                                                                        |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                                   |
| IK rating (impact degree of protection) | IK10                                                                                              |


| Material properties          |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| Colour                       | RAL 7035 grey, RAL 3000 red                                                    |
| RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP            | 50                                                                             |
| REACH SVHC substances        | Yes<br>Lead                                                                    |
| SCIP number                  | F6799547-ab84-42f2-938f-233ba663766d                                           |
| Approvals / Standards        |                                                                                |
| Reference standard           | EN 60309-1, -2 e -4                                                            |
| General ordering information |                                                                                |
| EAN13 code                   | 8015747082631                                                                  |
| Packaging Information        |                                                                                |
| Packaging length             | 535,00 mm                                                                      |
| Packaging height             | 320,00 mm                                                                      |
| Packaging width              | 325,00 mm                                                                      |
| Packaging weight             | 15,70 kg                                                                       |
| Packaging volume             | 55,64 dm <sup>3</sup>                                                          |
| Packaging description        | Carton box                                                                     |
| Packaging quantity           | 8 Pcs                                                                          |
| Packaging EAN code           | 8015747082648                                                                  |
| Sub-packaging length         | 290,00 mm                                                                      |
| Sub-packaging height         | 125,00 mm                                                                      |
| Sub-packaging width          | 155,00 mm                                                                      |
| Sub-packaging weight         | 1,96 kg                                                                        |
| Sub-packaging volume         | 5,62 dm <sup>3</sup>                                                           |
| Sub-packaging description    | Carton box                                                                     |
| Sub-packaging quantity       | 1 Pcs                                                                          |
| Sub-packaging EAN barcode    | 8015747082655                                                                  |

Part number

# PK 6365 EB



## Catalogue drawings

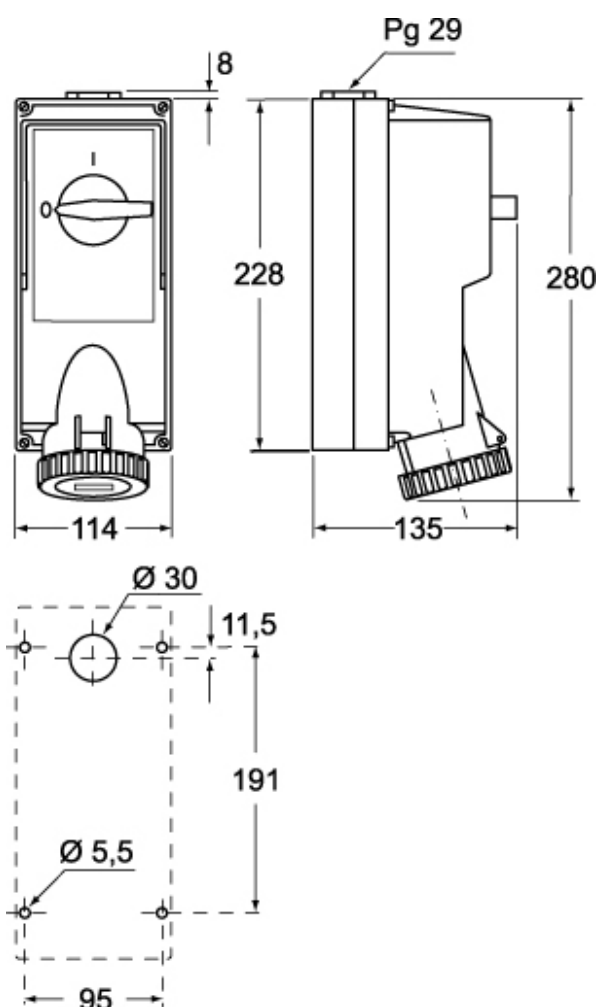

## Notes

Dimensions shown in mm are not binding and may be changed without notice.