

Part number

PN 1664 SV



Mobile plug, PLUSO LS-TYPE series, 3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V, straight

Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 9005 black
Series	PN...SV, PLUSO LS-TYPE	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Connection type	Screw terminal connection	China RoHs - EFUP	50
N. of poles	3 poles +	REACH SVHC substances	Yes Lead
Clock position	6	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Straight	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	16 A	General ordering information	
Voltage	380 ÷ 415 V	EAN13 code	8015747198684
IP degree of protection	IP44	Packaging Information	
Further technical details		Packaging length	400,00 mm
Weight	110,00 g	Packaging height	410,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	400,00 mm
		Packaging weight	11,10 kg
		Packaging volume	65,60 dm ³
		Packaging description	Carton box
		Packaging quantity	100 Pcs
		Packaging EAN code	8015747198691


Part number

PN 1664 SV



Catalogue drawings

(16A) PN ... SV

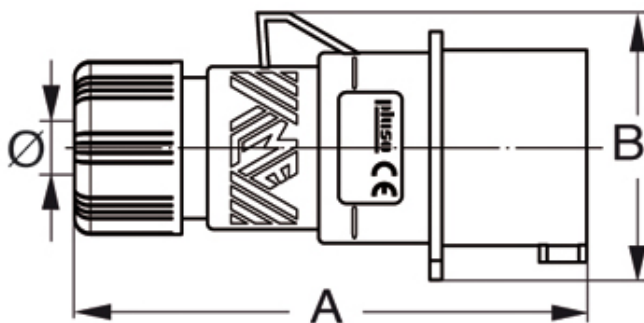

PN...SV	A	B	Ø min	Ø max
16A 2P+⊕	129	59,5	7	16
3P+⊕	129	67	7	16
3P+N+⊕	129	75	8	24

Notes

PN...SV/PV

PN...SV types 16A (IP44), entry with cable gland colour RAL 9005 black, enclosure colour RAL 9005 black

- PN...PV types 16A (IP44), enclosure and spring lid colour RAL 9005 black, entry with cable gland

- Compliant with EN 60309-1 and -2

- PN...SV types, enclosure and insert in insulating, thermoplastic, self-extinguishing material

- PN...PV types, enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material

- Terminals with retained screws

- IP44 degree of protection (EN 60529)

- PN...SV types 16A (IP44), entry with cable gland colour RAL 9005 black, enclosure colour RAL 9005 black

- PN...PV types 16A (IP44), enclosure and spring lid colour RAL 9005 black, entry with cable gland

- Compliant with EN 60309-1 and -2

- PN...SV types, enclosure and insert in insulating, thermoplastic, self-extinguishing material

- PN...PV types, enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material

- Terminals with retained screws

- IP44 degree of protection (EN 60529)

Dimensions shown in mm are not binding and may be changed without notice.