


Part number

# RCEM 24



Male insert, RCE series, crimp connection, 24 poles + PE, 16 A 500 V 6 kV 3, size "104.27", HNM - High Number of Matings version

#### Product description

|                        |  |
|------------------------|--|
| <b>Product type</b>    | Insert   |
| <b>Series</b>          | RCE  |
| <b>Connection type</b> | Crimp connection   |
| <b>Gender</b>          | Male   |
| <b>N. of poles</b>     | 24 poles +  |
| <b>Size</b>            | Size 104.27  |
| <b>Specification</b>   | HNM - High Number of Matings version   |

#### Technical data

|  |  |
|--|--|
| <b>Current</b>                           | 16 A   |
| <b>Voltage</b>                           | 500 V  |
| <b>Rated impulse withstand voltage</b>   | 6 kV   |
| <b>Pollution degree</b>                  | 3  |
| <b>Rated voltage according to UL/CSA</b> | 600 V  |
| <b>IP degree of protection</b>           | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure |

#### Further technical details

|   |                    |
|---|--------------------|
| <b>Mating cycles</b>                          | ≥ 10000            |
| <b>Insulation resistance</b>                  | ≥ 10 GΩ            |
| <b>Contact resistance</b>                     | ≤ 1 mΩ             |
| <b>Weight</b>                                 | 73,00 g            |
| <b>Operating temperature range (min, max)</b> | -40 °C ... +125 °C |
| <b>UL 94 flammability rating</b>              | V-0                |

#### Material properties

|                              |                    |
|------------------------------|--------------------|
| <b>Main material</b>         | Polycarbonate (PC) |
| <b>Colour</b>                | RAL 7032 grey      |
| <b>RoHs conformity</b>       | Compliant          |
| <b>China RoHs - EFUP</b>     | E                  |
| <b>REACH SVHC substances</b> | No                 |

#### Approvals / Standards

|                       |              |
|-----------------------|--------------|
| <b>Certifications</b> | DNV, BV, EAC |
| <b>UL</b>             | ECBT2        |

#### General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747253536 |
| <b>eCl@ss 8.1</b> | 27440205      |
| <b>ETIM 7.0</b>   | EC000438      |

#### Packaging Information


|                                  |                      |
|----------------------------------|----------------------|
| <b>Packaging length</b>          | 270,00 mm            |
| <b>Packaging height</b>          | 75,00 mm             |
| <b>Packaging width</b>           | 180,00 mm            |
| <b>Packaging weight</b>          | 2,57 kg              |
| <b>Packaging volume</b>          | 3,65 dm <sup>3</sup> |
| <b>Packaging description</b>     | Carton box           |
| <b>Packaging quantity</b>        | 30 Pcs               |
| <b>Packaging EAN code</b>        | 8015747253543        |
| <b>Sub-packaging length</b>      | 113,00 mm            |
| <b>Sub-packaging height</b>      | 36,00 mm             |
| <b>Sub-packaging width</b>       | 180,00 mm            |
| <b>Sub-packaging weight</b>      | 0,43 kg              |
| <b>Sub-packaging volume</b>      | 0,73 dm <sup>3</sup> |
| <b>Sub-packaging description</b> | Carton tray          |
| <b>Sub-packaging quantity</b>    | 5 Pcs                |
| <b>Sub-packaging EAN barcode</b> | 8015747253550        |

Part number


# RCEM 24



## Catalogue drawings

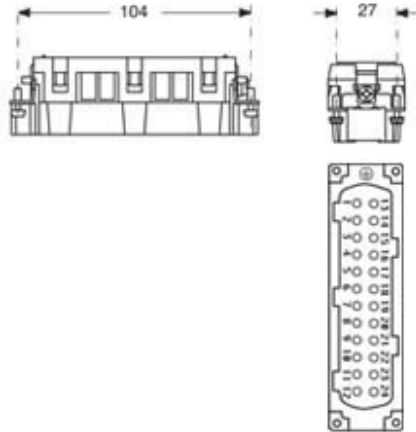

## Derating curves

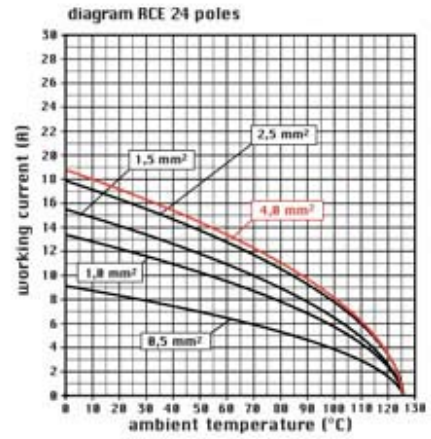

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

### California Proposition 65 Information



### WARNING

This product can expose you to nickel compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).