

Part number

SQE 3265



Interlocked switched socket-outlet, SQE series, 3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷ 240/415 V, without fuse-carrier

Product description

Product type	Interlocked switched socket-outlet
Series	SQE
N. of poles	3 poles + N + 
Clock position	6
Size	Socket fixing centre distance 88 x 230 mm
Specification	Without fuse-carrier

Technical data

Current	32 A
Voltage	200/346 ÷ 240/415 V
IP degree of protection	IP44

Further technical details

Weight	614,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK08

Material properties

Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information

EAN13 code	8015747086820
-------------------	---------------

Packaging Information


Packaging length	380,00 mm
Packaging height	250,00 mm
Packaging width	295,00 mm
Packaging weight	5,55 kg
Packaging volume	28,03 dm ³
Packaging description	Carton box
Packaging quantity	9 Pcs
Packaging EAN code	8015747086837
Sub-packaging weight	0,62 kg
Sub-packaging description	Plastic packaging
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747086844

Part number


SQE 3265



Catalogue drawings

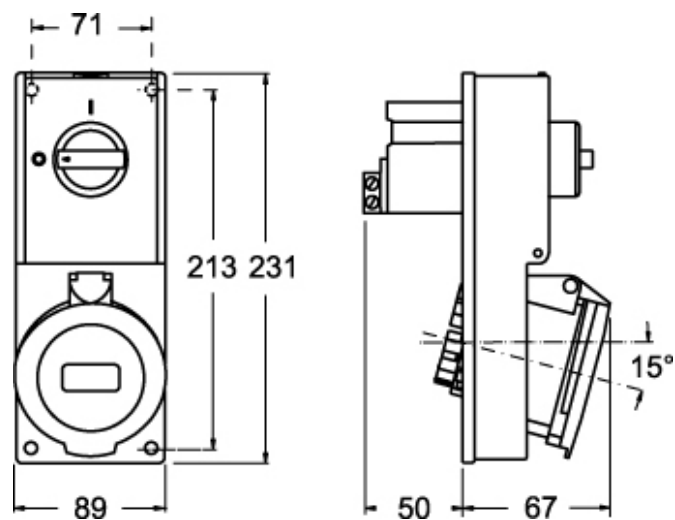

Catalogue drawings

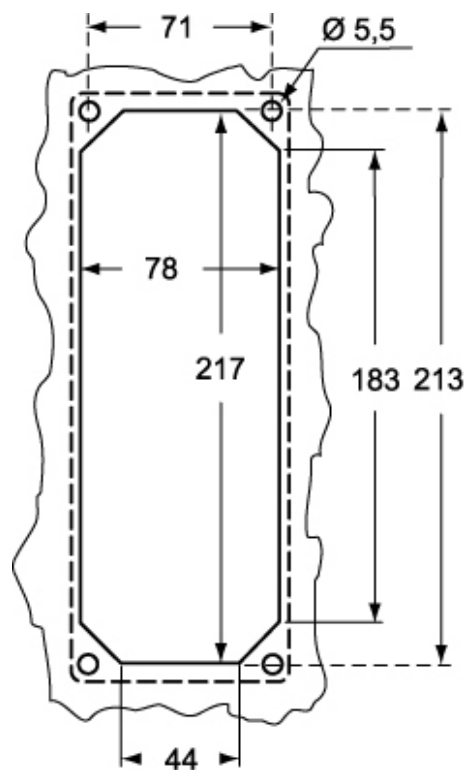

Notes

Dimensions shown in mm are not binding and may be changed without notice.