

Part number

# SQV 1643



Interlocked switched socket-outlet, SQV series, 2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V, sectionable fuse carrier 10 x 38 mm

## Product description

|                |                                                                                             |
|----------------|---------------------------------------------------------------------------------------------|
| Product type   | Interlocked switched socket-outlet                                                          |
| Series         | SQV                                                                                         |
| N. of poles    | 2 poles +  |
| Clock position | 4                                                                                           |
| Size           | Socket fixing centre distance 88 x 230 mm                                                   |
| Specification  | Sectionable fuse carrier 10 x 38 mm                                                         |

## Technical data

|                         |             |
|-------------------------|-------------|
| Current                 | 16 A        |
| Voltage                 | 100 ÷ 130 V |
| IP degree of protection | IP44        |

## Further technical details

|                                         |                 |
|-----------------------------------------|-----------------|
| Weight                                  | 545,00 g        |
| Operating temperature range (min, max)  | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK08            |

## Material properties

|                       |                                                                                |
|-----------------------|--------------------------------------------------------------------------------|
| Colour                | RAL 7035 grey, RAL 1021 yellow                                                 |
| RoHs conformity       | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP     | 50                                                                             |
| REACH SVHC substances | Yes<br>Lead                                                                    |
| SCIP number           | F6799547-ab84-42f2-938f-233ba663766d                                           |

## Approvals / Standards

|                    |                     |
|--------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|--------------------|---------------------|

## General ordering information

|            |               |
|------------|---------------|
| EAN13 code | 8015747087384 |
|------------|---------------|

## Packaging Information


|                           |                      |
|---------------------------|----------------------|
| Sub-packaging length      | 116,00 mm            |
| Sub-packaging height      | 103,00 mm            |
| Sub-packaging width       | 230,00 mm            |
| Sub-packaging weight      | 0,55 kg              |
| Sub-packaging volume      | 2,75 dm <sup>3</sup> |
| Sub-packaging description | Carton box           |
| Sub-packaging quantity    | 1 Pcs                |
| Sub-packaging EAN barcode | 8015747087391        |

Part number

SQV 1643




Catalogue drawings

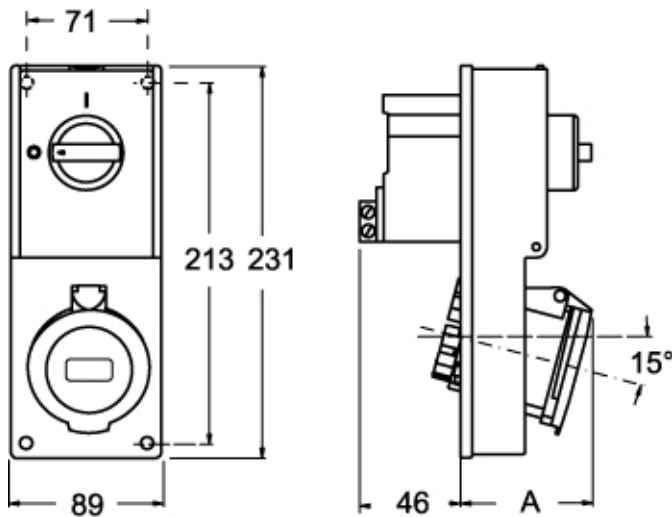

| SQV |        | A  |
|-----|--------|----|
| 16A | 2P+⊕   | 64 |
|     | 3P+⊕   | 65 |
|     | 3P+N+⊕ | 67 |

Catalogue drawings

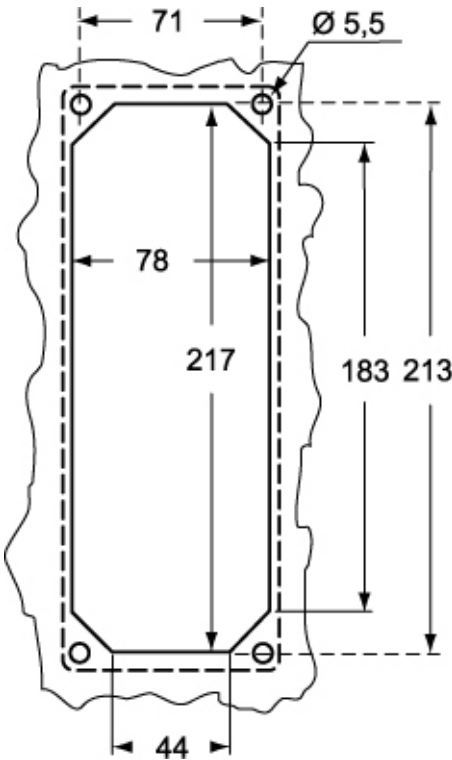

## Notes

Dimensions shown in mm are not binding and may be changed without notice.