

Part number

TM 3265KSIR



Interlocked switched socket-outlet, TM series, 3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷ 240/415 V, with compartment for modular units, 4,5 DIN-rail modules EN 60715, without base box


Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7012 grey, RAL 3000 red
Series	TM...SIR/KSIR	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles + N + 	China RoHs - EFUP	50
Clock position	6	REACH SVHC substances	Yes Lead
Size	114 x 255 mm fixing distance, for assembly in single or multiple boxes	SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Specification	With compartment for modular units, 4,5 DIN-rail modules EN 60715 Without base box	Approvals / Standards	
Technical data		Reference standard	EN 60309-1, -2 e -4
Current	32 A	General ordering information	
Voltage	200/346 ÷ 240/415 V	EAN13 code	8015747126144
IP degree of protection	IP66 / IP67	Packaging Information	
Further technical details		Packaging length	385,00 mm
Weight	1.140,00 g	Packaging height	320,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	485,00 mm
UL 94 flammability rating	V-2	Packaging weight	10,70 kg
IK rating (impact degree of protection)	IK10	Packaging volume	59,75 dm³
		Packaging description	Carton box
		Packaging quantity	9 Pcs
		Packaging EAN code	8015747126700
		Sub-packaging length	95,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	253,00 mm
		Sub-packaging weight	1,19 kg
		Sub-packaging volume	0,96 dm³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747126717

Part number

TM 3265KSIR



Catalogue drawings

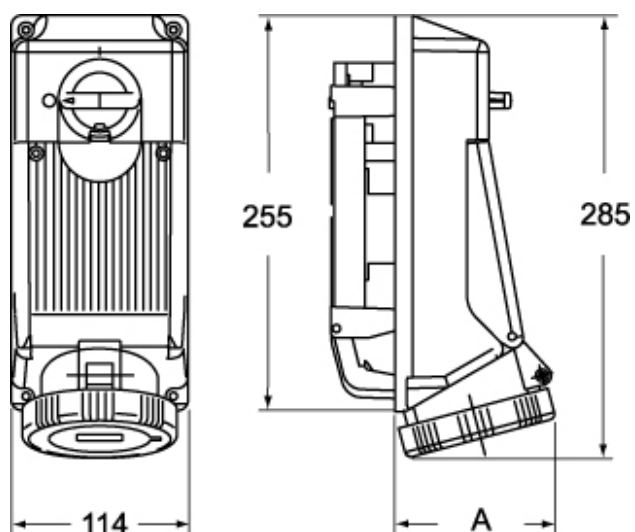

	A
2P+⊕	96
3P+⊕	96
3P+N+⊕	101

Notes

Dimensions shown in mm are not binding and may be changed without notice.