

Part number

# TM 3265KSIS



Interlocked switched socket-outlet, TM series, 3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷ 240/415 V, sectionable fuse carrier 10 x 38 mm, without base box


<b>Product description</b>		<b>Material properties</b>	
<b>Product type</b>	Interlocked switched socket-outlet	<b>Colour</b>	RAL 7012 grey, RAL 3000 red
<b>Series</b>	TM.. SIS/KSIS	<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>N. of poles</b>	3 poles + N +	<b>China RoHs - EFUP</b>	50
<b>Clock position</b>	6	<b>REACH SVHC substances</b>	Yes Lead
<b>Size</b>	114 x 255 mm fixing distance, for assembly in single or multiple boxes	<b>SCIP number</b>	Ce861c8d-b979-403b-96d9-80aef6dc281d
<b>Specification</b>	Sectionable fuse carrier 10 x 38 mm Without base box	<b>Approvals / Standards</b>	
<b>Technical data</b>		<b>Reference standard</b>	EN 60309-1, -2 e -4
<b>Current</b>	32 A	<b>General ordering information</b>	
<b>Voltage</b>	200/346 ÷ 240/415 V	<b>EAN13 code</b>	8015747126168
<b>IP degree of protection</b>	IP66 / IP67	<b>Packaging Information</b>	
<b>Further technical details</b>		<b>Packaging length</b>	385,00 mm
<b>Weight</b>	1.430,00 g	<b>Packaging height</b>	320,00 mm
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C	<b>Packaging width</b>	485,00 mm
<b>UL 94 flammability rating</b>	V-2	<b>Packaging weight</b>	12,87 kg
<b>IK rating (impact degree of protection)</b>	IK10	<b>Packaging volume</b>	59,75 dm <sup>3</sup>
		<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	9 Pcs
		<b>Packaging EAN code</b>	8015747127004
		<b>Sub-packaging length</b>	95,00 mm
		<b>Sub-packaging height</b>	40,00 mm
		<b>Sub-packaging width</b>	253,00 mm
		<b>Sub-packaging weight</b>	1,43 kg
		<b>Sub-packaging volume</b>	0,96 dm <sup>3</sup>
		<b>Sub-packaging description</b>	Carton tray
		<b>Sub-packaging quantity</b>	1 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747127011

Part number

# TM 3265KSIS



## Catalogue drawings

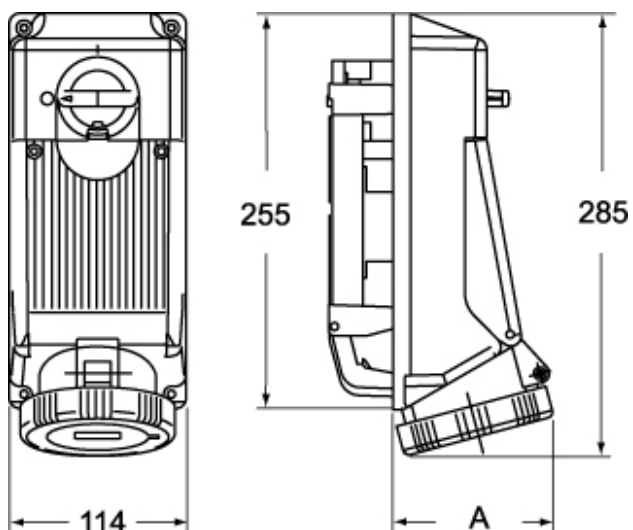

---

	<b>A</b>
<b>2P+⊕</b>	96
<b>3P+⊕</b>	96
<b>3P+N+⊕</b>	101

---

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

---