

Part number

TM 3295KSIS



Interlocked switched socket-outlet, TM series, 3 poles + N + PE, 9 h (blue), 32 A, 120/208 ÷ 144/250 V, sectionable fuse carrier 10 x 38 mm, without base box

Product description

Product type	Interlocked switched socket-outlet
Series	TM.. SIS/KSIS
N. of poles	3 poles + N + 
Clock position	9
Size	114 x 255 mm fixing distance, for assembly in single or multiple boxes
Specification	Sectionable fuse carrier 10 x 38 mm Without base box

Technical data

Current	32 A
Voltage	120/208 ÷ 144/250 V
IP degree of protection	IP66 / IP67

Further technical details

Weight	1.430,00 g
Operating temperature range (min, max)	-25°C ... +40°C
UL 94 flammability rating	V-2
IK rating (impact degree of protection)	IK10

Material properties

Colour	RAL 7012 grey, RAL 5015 blue
---------------	------------------------------

Approvals / Standards

Reference standard	EN 60309-1, -2 e -4
---------------------------	---------------------

General ordering information


EAN13 code	8015747126335
-------------------	---------------

Part number

TM 3295KSIS



Catalogue drawings

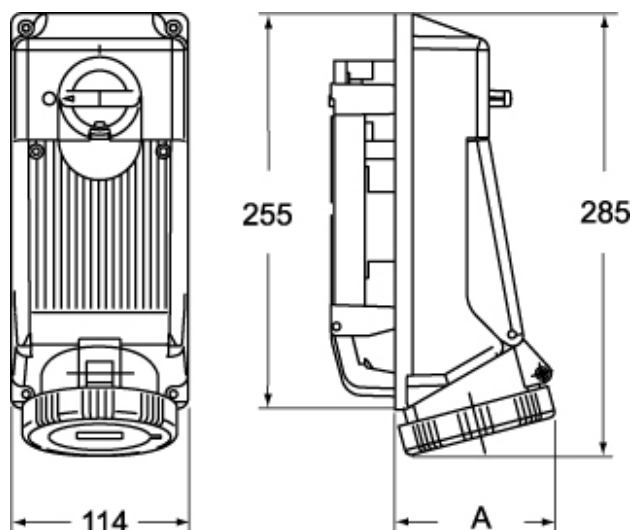

	A
2P+ ⊕	96
3P+ ⊕	96
3P+N+ ⊕	101

Notes

Dimensions shown in mm are not binding and may be changed without notice.