

Part number
CDYF 08



Female insert, CDY series, AXYR® spring push-in terminal connection without tools, 8 poles, 10 A 50 V 0,8 kV 3, size "21.21"

Product description	
Product type	Insert
Series	CDY
Connection type	AXYR® high density spring terminal connection without tools
Gender	Female
N. of poles	8 poles
Size	Size "21.21"
Technical data	
Current	10 A
Rated impulse withstand voltage	0,8 kV
Pollution degree	3
Rated voltage according to UL/CSA	50 V AC/120 V DC
Contact type	Turned silver plated
IP degree of protection	IP20 without enclosure, IP44/IP66/IP67/IP68/IP69 with enclosure
Further technical details	
Characteristics according to EN 61984	10A 50V ac / 120 dc 0,8kV 3
Mating cycles	≥ 500
Insulation resistance	≥ 10 GΩ
Contact resistance	≤ 3 mΩ
Weight	18,00 g
Operating temperature range (min, max)	-40 °C ... +125 °C
Conductors stripping length	9...11 mm
UL 94 flammability rating	V-0


Material properties	
Main material	Polycarbonate (PC)
Other materials	Contacts: copper alloy
Colour	RAL 7032 grey
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
General ordering information	
EAN13 code	8015747292900
eCl@ss 8.1	27440205
ETIM 7.0	EC000438
Packaging Information	
Packaging length	280,00 mm
Packaging height	170,00 mm
Packaging width	185,00 mm
Packaging weight	2,16 kg
Packaging volume	8,81 dm ³
Packaging description	Carton box
Packaging quantity	100 Pcs
Packaging EAN code	8015747292917
Sub-packaging weight	0,02 kg
Sub-packaging description	Plastic bag
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747292924

Part number

CDYF 08




Catalogue drawings

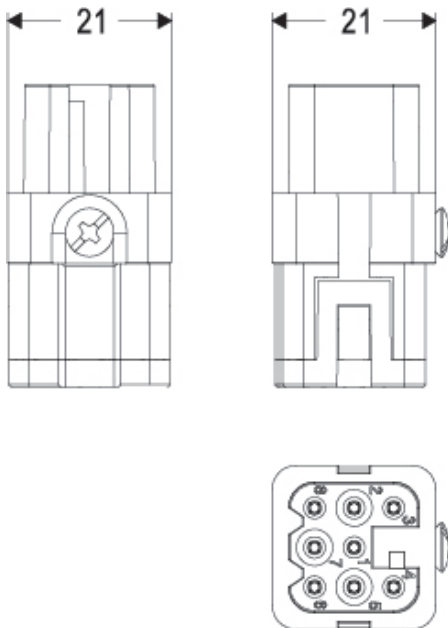

Derating curves

CDY 08 poles connector inserts
Maximum current load derating diagram

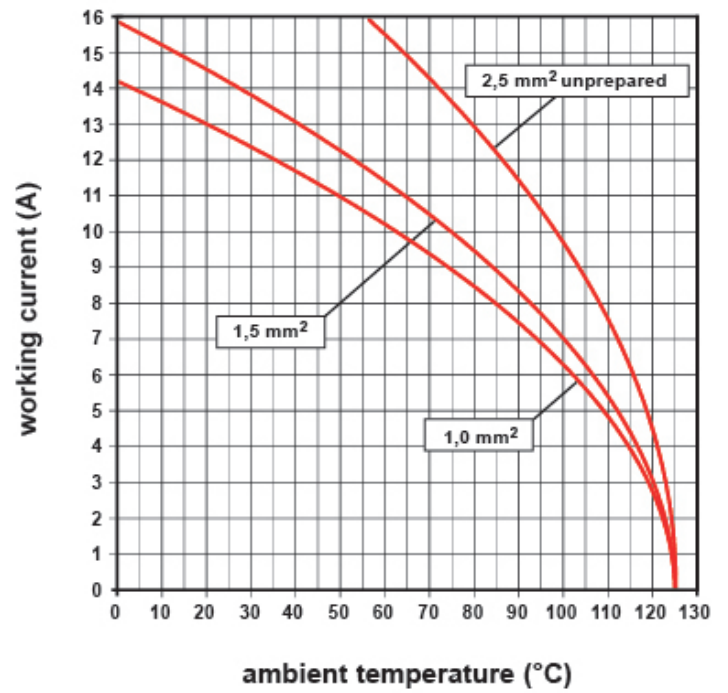

Notes