


Part number

# CQYF 08E



Female insert, CQY series, AXYR® spring push-in terminal connection without tools, 8 poles + PE, 16 A 500 V 6 kV 3, size "32.13", with PE plate


Product description		Material properties	
<b>Product type</b>	Insert	<b>Main material</b>	Polycarbonate (PC)
<b>Series</b>	CQY	<b>Other materials</b>	Contacts: copper alloy
<b>Connection type</b>	AXYR® high density spring terminal connection without tools	<b>Colour</b>	RAL 7032 grey
<b>Gender</b>	Female	<b>RoHS conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>N. of poles</b>	8 poles + 	<b>China RoHS - EFUP</b>	50
<b>Size</b>	Size "32.13"	<b>REACH SVHC substances</b>	Yes Lead
<b>Specification</b>	With PE plate		
Technical data		Approvals / Standards	
<b>Current</b>	16 A	<b>Certifications</b>	DNV
<b>Voltage</b>	500 V		
<b>Rated impulse withstand voltage</b>	6 kV	General ordering information	
<b>Pollution degree</b>	3	<b>EAN13 code</b>	8015747284615
<b>Rated voltage according to UL/CSA</b>	600 V	<b>eCl@ss 8.1</b>	27440205
<b>Wire cross-section</b>	0,25 mm <sup>2</sup> - 4,00 mm <sup>2</sup>	<b>ETIM 7.0</b>	EC000438
<b>AWG size</b>	24 - 12		
<b>Contact type</b>	Turned silver plated	Packaging Information	
<b>IP degree of protection</b>	IP20 without enclosure, IP66/IP67/IP69 with enclosure	<b>Packaging length</b>	245,00 mm
		<b>Packaging height</b>	165,00 mm
		<b>Packaging width</b>	215,00 mm
		<b>Packaging weight</b>	1,87 kg
		<b>Packaging volume</b>	8,69 dm <sup>3</sup>
		<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	50 Pcs
		<b>Packaging EAN code</b>	8015747284639
		<b>Sub-packaging weight</b>	0,04 kg
		<b>Sub-packaging description</b>	Plastic bag
		<b>Sub-packaging quantity</b>	1 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747139878
Further technical details			
<b>Characteristics according to EN 61984</b>	16 A 500 V 6 kV 3; 16 A 400/690 V 8 kV 2		
<b>Mating cycles</b>	≥ 500		
<b>Insulation resistance</b>	≥ 10 GΩ		
<b>Contact resistance</b>	≤ 3 mΩ		
<b>Weight</b>	31,00 g		
<b>Operating temperature range (min, max)</b>	-40 °C ... +125 °C		
<b>Conductors stripping length</b>	9...11 mm		
<b>UL 94 flammability rating</b>	V-0		

Part number

# CQYF 08E




## Catalogue drawings

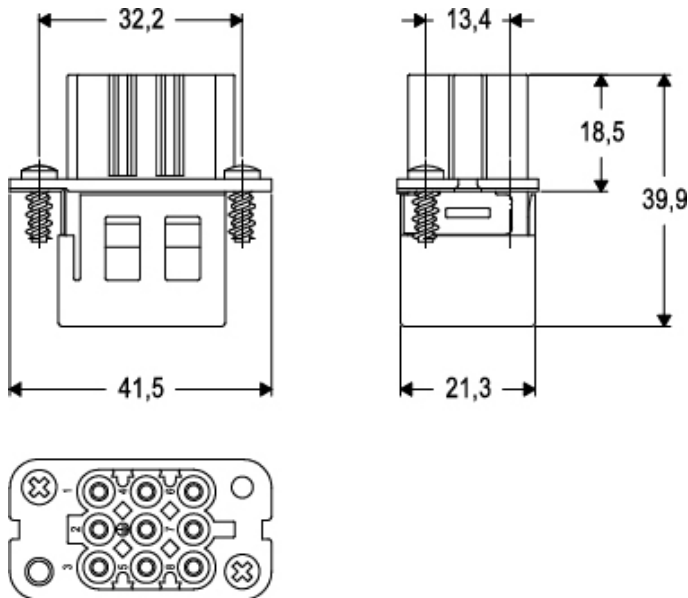

## Derating curves

**CQY..E 8 poles connector inserts**  
**Maximum current load derating diagram**

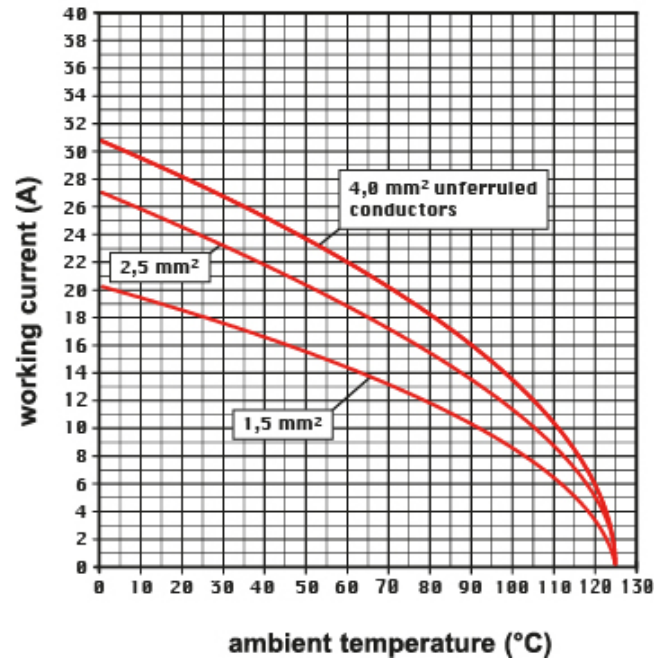

Notes