

Part number

# CX 04 RM



Male modular insert, Mixo Data series, coaxial, 4 poles, 1 module, for crimp contacts


| Product description                           |  | Material properties                 |                      |
|---|--|-------------------------------------|----------------------|
| <b>Product type</b>                           | Modular insert   | <b>Main material</b>                | Polycarbonate (PC)   |
| <b>Series</b>                                 | Mixo Data  | <b>Colour</b>                       | RAL 7032 grey        |
| <b>Connection type</b>                        | Coaxial  | <b>RoHs conformity</b>              | Compliant            |
| <b>Gender</b>                                 | Male   | <b>China RoHs - EFUP</b>            | E                    |
| <b>N. of poles</b>                            | 4 seats for fibre optic SC contacts                        | <b>REACH SVHC substances</b>        | No                   |
| <b>Size</b>                                   | 1 module   | <b>Approvals / Standards</b>        |                      |
| <b>Specification</b>                          | For crimp contacts   | <b>Certifications</b>               | DNV, BV              |
| <b>Technical data</b>                         |  | <b>UL</b>                           | ECBT2                |
| <b>Current</b>                                | 1 A  | <b>cUL</b>                          | ECBT8                |
| <b>Voltage</b>                                | 50 V   | <b>General ordering information</b> |                      |
| <b>IP degree of protection</b>                | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | <b>EAN13 code</b>                   | 8015747232975        |
| <b>Further technical details</b>              |  | <b>eCl@ss 8.1</b>                   | 27440205             |
| <b>Mating cycles</b>                          | ≥ 500  | <b>ETIM 7.0</b>                     | EC000438             |
| <b>Insulation resistance</b>                  | ≥ 5 GΩ   | <b>Packaging Information</b>        |                      |
| <b>Weight</b>                                 | 8,00 g   | <b>Packaging length</b>             | 180,00 mm            |
| <b>Operating temperature range (min, max)</b> | -40 °C ... +125 °C   | <b>Packaging height</b>             | 120,00 mm            |
| <b>UL 94 flammability rating</b>              | V-0  | <b>Packaging width</b>              | 155,00 mm            |
|   |  | <b>Packaging weight</b>             | 0,69 kg              |
|   |  | <b>Packaging volume</b>             | 3,35 dm <sup>3</sup> |
|   |  | <b>Packaging description</b>        | Carton box           |
|   |  | <b>Packaging quantity</b>           | 60 Pcs               |
|   |  | <b>Packaging EAN code</b>           | 8015747233071        |
|   |  | <b>Sub-packaging length</b>         | 35,00 mm             |
|   |  | <b>Sub-packaging height</b>         | 40,00 mm             |
|   |  | <b>Sub-packaging width</b>          | 155,00 mm            |
|   |  | <b>Sub-packaging weight</b>         | 0,12 kg              |
|   |  | <b>Sub-packaging volume</b>         | 0,22 dm <sup>3</sup> |
|   |  | <b>Sub-packaging description</b>    | Carton tray          |
|   |  | <b>Sub-packaging quantity</b>       | 10 Pcs               |
|   |  | <b>Sub-packaging EAN barcode</b>    | 8015747233088        |

Part number

# CX 04 RM



## Catalogue drawings

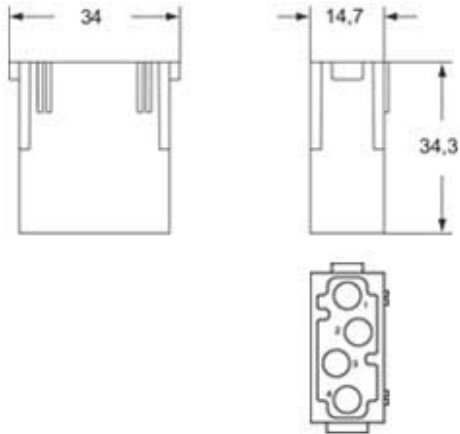

---

Notes