

Part number

CXFA 4.0



Female crimp contact, CX series, 40 A, turned silver plated, wire cross section 4 mm², AWG 12


Product description		Material properties	
Product type	Crimp contact	Main material	Copper alloy
Series	CX		Compliant with exemption
Gender	Female	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Technical data		China RoHs - EFUP	50
Current	40 A	REACH SVHC substances	Yes Lead
Wire cross-section	4,00 mm ²	SCIP number	C0979fba-9907-458f-a94a-db781440f273
AWG size	12	Approvals / Standards	
Contact type	Turned silver plated	Certifications	CSA, EAC
Further technical details		UL	ECBT2
Weight	2,60 g	cUL	ECBT8
Conductors stripping length	9,6 mm	General ordering information	
		EAN13 code	8015747042499
		eCl@ss 8.1	27440204
		ETIM 7.0	EC000796
		Packaging Information	
		Packaging length	112,00 mm
		Packaging height	95,00 mm
		Packaging width	117,00 mm
		Packaging weight	1,23 kg
		Packaging volume	1,24 dm ³
		Packaging description	Carton box
		Packaging quantity	400 Pcs
		Packaging EAN code	8015747207058
		Sub-packaging length	50,00 mm
		Sub-packaging height	44,00 mm
		Sub-packaging width	50,00 mm
		Sub-packaging weight	0,15 kg
		Sub-packaging volume	0,11 dm ³
		Sub-packaging description	Plastic box
		Sub-packaging quantity	50 Pcs
		Sub-packaging EAN barcode	8015747042505

Part number

CXFA 4.0



Catalogue drawings

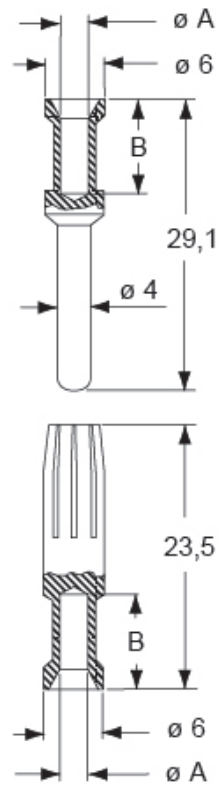

CXF and CXM contacts

conductor cross-sectional area (mm ²)	conductor slot $\varnothing A$ (mm)	conductor stripping length B (mm)
1,5	1,8	9
2,5	2,2	9
4	2,85	9,6
6	3,5	9,6
10	4,3	15

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
