

Part number

PB 32002 SV



Mobile plug, PLUSO series, 2 poles, 32 A, 20 ÷ 25 V

Product description

Product type	Plug Mobile
Series	PB...SV, PLUSO
N. of poles	2 poles
Clock position	No key way

Technical data

Current	32 A
Voltage	20 ÷ 25 V
IP degree of protection	IP44

Further technical details

Weight	107,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 4001 lilac Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
RoHs conformity	Yes
China RoHs - EFUP	50
REACH SVHC substances	Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747061834
-------------------	---------------

Packaging Information


Packaging length	220,00 mm
Packaging height	130,00 mm
Packaging width	240,00 mm
Sub-packaging weight	1,07 kg
Sub-packaging description	Carton box
Sub-packaging quantity	10 Pcs
Sub-packaging EAN barcode	8015747061841

Part number

PB 32002 SV



Catalogue drawings
(16 / 32A) PB ... SV

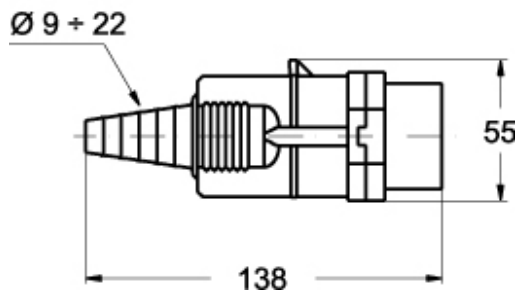

Notes