


Part number

PE 1663 SV



Mobile plug, PLUSO series, 2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V, straight

| Product description | | Material properties | |
|---|---|------------------------------|---|
| Product type | Plug Mobile | Colour | RAL 7035 grey, RAL 5015 blue |
| Series | PE...SV, PLUSO | RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| Connection type | Screw terminal connection | China RoHs - EFUP | 50 |
| N. of poles | 2 poles +  | REACH SVHC substances | Yes Lead |
| Clock position | 6 | SCIP number | Ca7de37f-add8-4b77-9861-279c94903ade |
| Specification | Straight | Approvals / Standards | |
| Technical data | | Reference standard | EN 60309-1 and -2 |
| Current | 16 A | General ordering information | |
| Voltage | 200 ÷ 250 V | EAN13 code | 8015747064538 |
| IP degree of protection | IP44 | Packaging Information | |
| Further technical details | | Packaging length | 400,00 mm |
| Weight | 100,00 g | Packaging height | 300,00 mm |
| Operating temperature range (min, max) | -25°C ... +40°C | Packaging width | 400,00 mm |
| | | Packaging weight | 10,27 kg |
| | | Packaging volume | 48,00 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 100 Pcs |
| | | Packaging EAN code | 8015747064545 |


Part number

PE 1663 SV



Catalogue drawings

(16 / 32A) PE ... SV

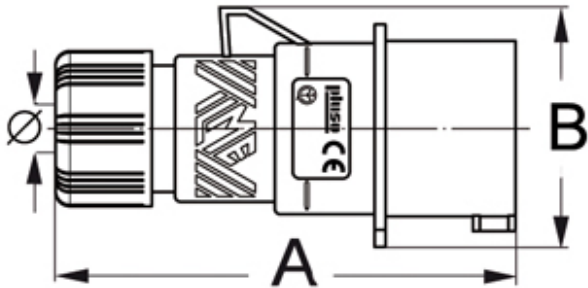

| PE...SV | A | B | ø min | ø max |
|-----------------|-----|------|-------|-------|
| 16A 2P+⊕ | 129 | 59,5 | 7 | 16 |
| 3P+⊕ | 129 | 67 | 7 | 16 |
| 3P+N+⊕ | 129 | 75 | 8 | 24 |
| 32A 2P+⊕ | 150 | 81 | 8 | 24 |
| 3P+⊕ | 150 | 81 | 8 | 24 |
| 3P+N+⊕ | 150 | 90 | 8 | 24 |

Notes