

Part number

# PEW 6364 PV



Mobile socket outlet, PLUSO series, 3 poles + PE, 6 h (red), 63 A, 380 ÷ 415 V

| Product description                    |                                                                                             | Material properties          |                                                                                |
|----------------------------------------|---------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                           | Socket<br>Mobile                                                                            | Colour                       | RAL 7035 grey, RAL 3000 red                                                    |
| Series                                 | PEW...PV, PLUSO                                                                             | RoHs conformity              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                            | 3 poles +  | China RoHs - EFUP            | 50                                                                             |
| Clock position                         | 6                                                                                           | REACH SVHC substances        | Yes<br>Lead                                                                    |
| Technical data                         |                                                                                             | SCIP number                  | Ca7de37f-add8-4b77-9861-279c94903ade                                           |
| Current                                | 63 A                                                                                        | Approvals / Standards        |                                                                                |
| Voltage                                | 380 ÷ 415 V                                                                                 | Reference standard           | EN 60309-1 and -2                                                              |
| IP degree of protection                | IP67                                                                                        | General ordering information |                                                                                |
| Further technical details              |                                                                                             | EAN13 code                   | 8015747077507                                                                  |
| Weight                                 | 915,00 g                                                                                    | Packaging Information        |                                                                                |
| Operating temperature range (min, max) | -25°C ... +40°C                                                                             | Packaging length             | 300,00 mm                                                                      |
|                                        |                                                                                             | Packaging height             | 130,00 mm                                                                      |
|                                        |                                                                                             | Packaging width              | 200,00 mm                                                                      |
|                                        |                                                                                             | Packaging weight             | 1,92 kg                                                                        |
|                                        |                                                                                             | Packaging volume             | 7,80 dm <sup>3</sup>                                                           |
|                                        |                                                                                             | Packaging description        | Carton box                                                                     |
|                                        |                                                                                             | Packaging quantity           | 2 Pcs                                                                          |
|                                        |                                                                                             | Packaging EAN code           | 8015747077514                                                                  |


Part number

# PEW 6364 PV



Catalogue drawings

(63 / 125A) PEW ... PV

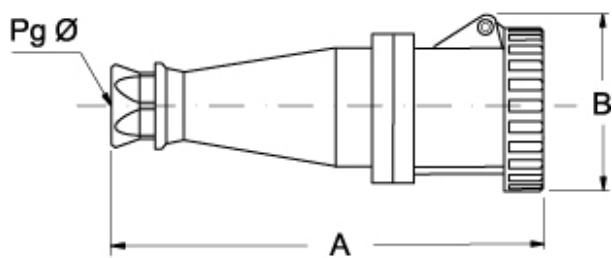

| PEW ... PV  |        | A   | B     | Pg Ø   |
|-------------|--------|-----|-------|--------|
| <b>63A</b>  | 2P+⊕   | 277 | 108,5 | 36     |
|             | 3P+⊕   | 277 | 108,5 | 36     |
|             | 3P+N+⊕ | 277 | 108,5 | 36     |
| <b>125A</b> | 2P+⊕   | 324 | 120,5 | 2" gas |
|             | 3P+⊕   | 324 | 120,5 | 2" gas |
|             | 3P+N+⊕ | 324 | 120,5 | 2" gas |

Notes