

Part number

PK 1633 PB5



Interlocked switched socket-outlet, PK series,
2 poles + PE, 3 h (white), 16 A, 50 ÷ 250 V,
E16 fuse carrier

Product description	
Product type	Interlocked switched socket-outlet
Series	PK..PB5
N. of poles	2 poles +
Clock position	3
Specification	E16 fuse carrier
Technical data	
Current	16 A
Voltage	> 50 ÷ 250 V
IP degree of protection	IP55
Further technical details	
Weight	1.820,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7035 grey, RAL 9010 white
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747079921
Packaging Information	
Packaging length	400,00 mm
Packaging height	310,00 mm
Packaging width	670,00 mm
Packaging weight	27,30 kg
Packaging volume	83,08 dm ³
Packaging description	Carton box
Packaging quantity	15 Pcs
Packaging EAN code	8015747079938
Sub-packaging length	285,00 mm
Sub-packaging height	130,00 mm
Sub-packaging width	130,00 mm
Sub-packaging weight	1,82 kg
Sub-packaging volume	4,82 dm ³
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747079945

Part number

PK 1633 PB5



Catalogue drawings

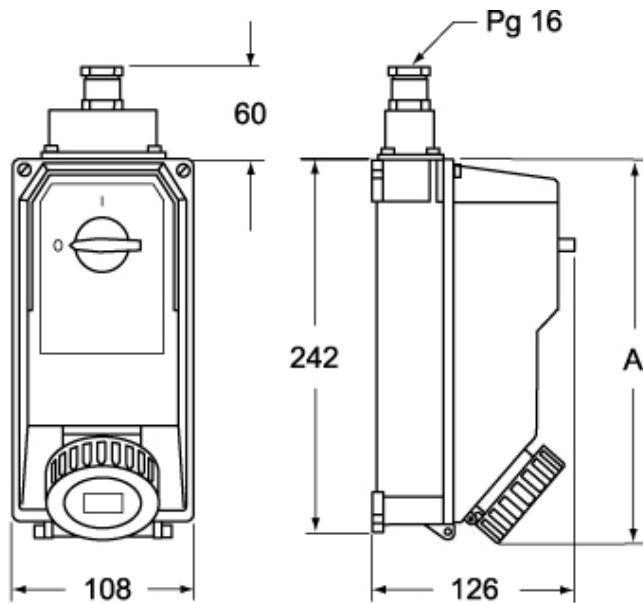

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270

Notes