


Part number

# PK 1634 EB



Interlocked switched socket-outlet, PK series,  
3 poles + PE, 3 h (red), 16 A, 380 ÷ 380 V,  
without fuse-carrier

Product description	
Product type	Interlocked switched socket-outlet
Series	PK..EB
N. of poles	3 poles + 
Clock position	3
Specification	Without fuse-carrier
Technical data	
Current	16 A
Voltage	380V (50Hz.) 440V (60Hz.)
IP degree of protection	IP44
Further technical details	
Weight	520,00 g
Operating temperature range (min, max)	-25°C ... +40°C
IK rating (impact degree of protection)	IK10


Material properties	
Colour	RAL 7035 grey, RAL 3000 red
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Approvals / Standards	
Reference standard	EN 60309-1, -2 e -4
General ordering information	
EAN13 code	8015747079952
Packaging Information	
Sub-packaging weight	0,52 kg
Sub-packaging description	Carton box
Sub-packaging quantity	1 Pcs
Sub-packaging EAN barcode	8015747079969

Part number

# PK 1634 EB



Catalogue drawings

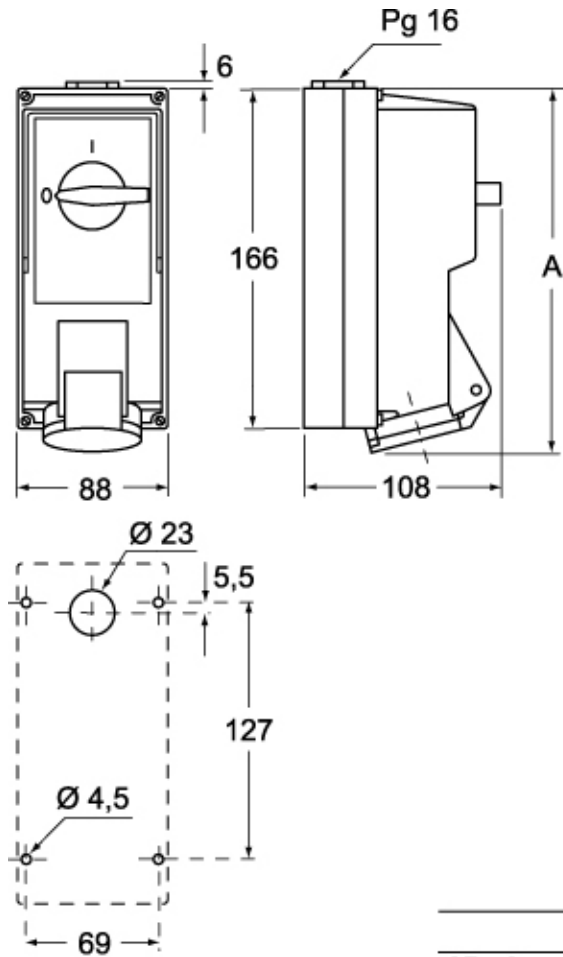

	<b>A</b>
<b>2P+⊕</b>	182
<b>3P+⊕</b>	182
<b>3P+N+⊕</b>	187

Notes