

Part number

PK 1664 PB5



Interlocked switched socket-outlet, PK series,
3 poles + PE, 6 h (red), 16 A, 380 ÷ 415 V,
E16 fuse carrier



Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 3000 red
Series	PK..PB5		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	3 poles +	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Clock position	6	China RoHs - EFUP	50
Specification	E16 fuse carrier	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ce861c8d-b979-403b-96d9-80aef6dc281d
Current	16 A	Approvals / Standards	
Voltage	380 ÷ 415 V	Reference standard	EN 60309-1, -2 e -4
IP degree of protection	IP55	General ordering information	
Further technical details		EAN13 code	8015747080286
Weight	1.550,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Packaging weight	13,95 kg
IK rating (impact degree of protection)	IK10	Packaging volume	52,36 dm ³
		Packaging description	Carton box
		Packaging quantity	9 Pcs
		Packaging EAN code	8015747107631
		Sub-packaging weight	1,55 kg
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747080309

Part number

PK 1664 PB5



Catalogue drawings

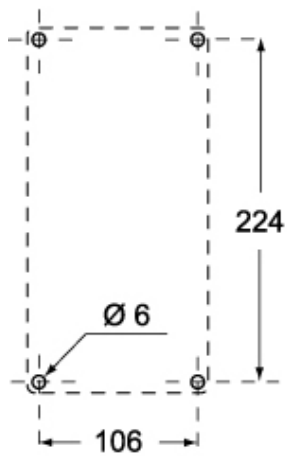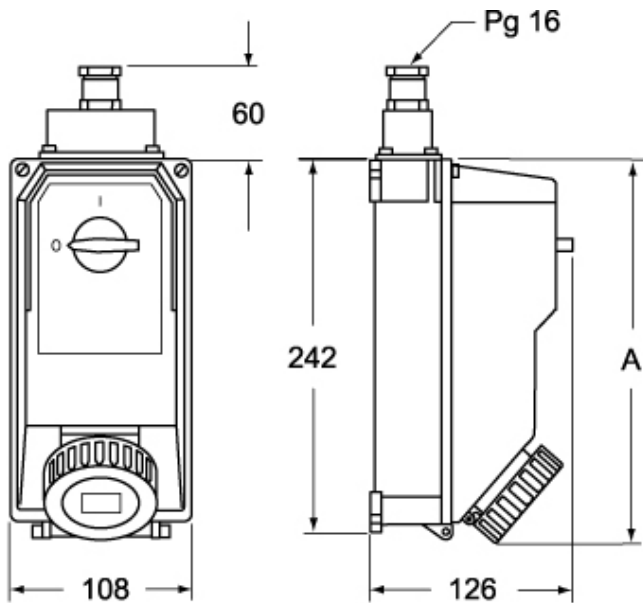

	A
2P+⊕	260
3P+⊕	260
3P+N+⊕	270

Notes