

Part number

# TM 1645 SIS



Interlocked switched socket-outlet, TM series,  
3 poles + N + PE, 4 h (yellow), 16 A, 57/100 ÷  
75/130 V, sectionable fuse carrier 10 x 38  
mm, without base box

#### Product description

|                |                                                                                                   |
|----------------|---------------------------------------------------------------------------------------------------|
| Product type   | Interlocked switched socket-outlet                                                                |
| Series         | TM.. SIS/KSIS                                                                                     |
| N. of poles    | 3 poles + N +  |
| Clock position | 4                                                                                                 |
| Size           | 114 x 255 mm fixing distance, for assembly in single or multiple boxes                            |
| Specification  | Sectionable fuse carrier 10 x 38 mm<br>Without base box                                           |

#### Technical data

|                         |                   |
|-------------------------|-------------------|
| Current                 | 16 A              |
| Voltage                 | 57/100 ÷ 75/130 V |
| IP degree of protection | IP66 / IP67       |

#### Further technical details

|                                         |                 |
|-----------------------------------------|-----------------|
| Weight                                  | 1.340,00 g      |
| Operating temperature range (min, max)  | -25°C ... +40°C |
| UL 94 flammability rating               | V-2             |
| IK rating (impact degree of protection) | IK10            |

#### Material properties

|        |                                |
|--------|--------------------------------|
| Colour | RAL 7012 grey, RAL 1021 yellow |
|--------|--------------------------------|

#### Approvals / Standards

|                    |                     |
|--------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|--------------------|---------------------|

#### General ordering information

|            |               |
|------------|---------------|
| EAN13 code | 8015747089739 |
|------------|---------------|

#### Packaging Information


|                           |               |
|---------------------------|---------------|
| Sub-packaging weight      | 1,34 kg       |
| Sub-packaging description | Carton tray   |
| Sub-packaging quantity    | 1 Pcs         |
| Sub-packaging EAN barcode | 8015747108430 |

Part number

# TM 1645 SIS



Catalogue drawings

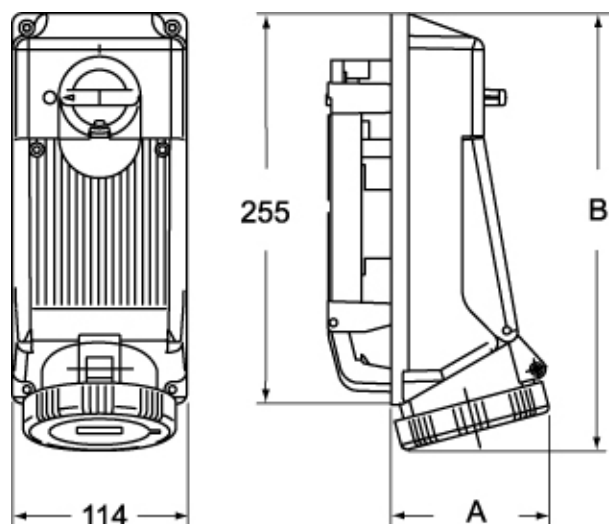

|               | <b>A</b> | <b>B</b> |
|---------------|----------|----------|
| <b>2P+⊕</b>   | 83       | 276      |
| <b>3P+⊕</b>   | 85       | 276      |
| <b>3P+N+⊕</b> | 90       | 277      |

---

Notes