


Part number

# TM 6344 SP



Interlocked switched socket-outlet, TM series, 3 poles + PE, 4 h (yellow), 63 A, 100 ÷ 130 V, without fuse-carrier, with base box

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Interlocked switched socket-outlet  |
| <b>Series</b>         | TM..SP/KSP  |
| <b>N. of poles</b>    | 3 poles +  |
| <b>Clock position</b> | 4   |
| <b>Size</b>           | 145 x 565 x 18 mm   |
| <b>Specification</b>  | Without fuse-carrier<br>With base box   |

#### Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 63 A        |
| <b>Voltage</b>                 | 100 ÷ 130 V |
| <b>IP degree of protection</b> | IP66 / IP67 |

#### Further technical details

|  |                               |
|--|-------------------------------|
| <b>Weight</b>                                  | 3.480,00 g                    |
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C               |
| <b>UL 94 flammability rating</b>               | V-0 (insert), V-2 (enclosure) |
| <b>IK rating (impact degree of protection)</b> | IK10                          |

#### Material properties

|               |                                |
|---------------|--------------------------------|
| <b>Colour</b> | RAL 7012 grey, RAL 1021 yellow |
|---------------|--------------------------------|

#### Approvals / Standards

|                           |                     |
|---------------------------|---------------------|
| <b>Reference standard</b> | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

#### General ordering information



|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747100588 |
|-------------------|---------------|

Part number

# TM 6344 SP



Catalogue drawings

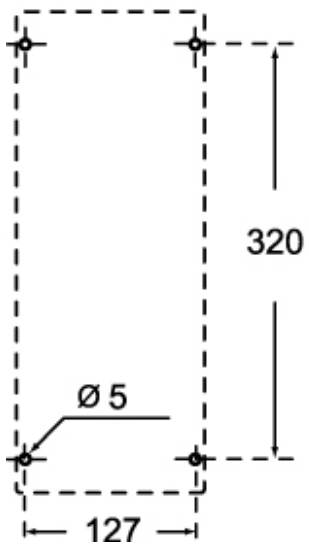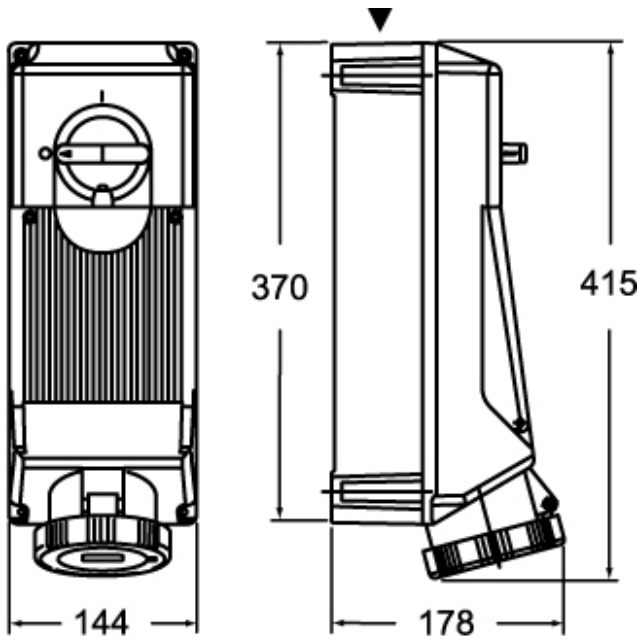

Notes