


Part number

# CIF 5 2.4

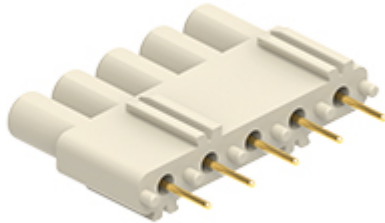

Interface for printed circuit, 5 poles, for use in combination with 2 CIF 2.4, for up to 2,4 mm thick PCB

Product description		Material properties	
<b>Product type</b>	Interface for printed circuit	<b>Main material</b>	Polycarbonate (PC)
<b>N. of poles</b>	5 poles	<b>Other materials</b>	Contacts: copper alloy
<b>Specification</b>	6C5 For up to 2,4 mm thick PCB	<b>Colour</b>	RAL 7032 grey
Technical data		<b>RoHS conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>Rated voltage according to UL/CSA</b>	160 V	<b>China RoHS - EFUP</b>	50
<b>Contact type</b>	Turned gold plated	<b>REACH SVHC substances</b>	Yes Lead
Further technical details		<b>SCIP number</b>	022a8a72-7a4c-443a-a1ad-2461ccc7884c
<b>Characteristics according to EN 61984</b>	7,5 A 160 V 2,5 kV 3	<b>Approvals / Standards</b>	
<b>Insulation resistance</b>	≥ 10 GΩ	<b>Certifications</b>	DNV
<b>Weight</b>	2,04 g	<b>General ordering information</b>	
<b>Operating temperature range (min, max)</b>	-40°C...+125°C	<b>EAN13 code</b>	8015747181488
		<b>eCl@ss 8.1</b>	27449290
		<b>ETIM 7.0</b>	EC002637
		<b>Packaging Information</b>	
		<b>Packaging length</b>	112,00 mm
		<b>Packaging height</b>	95,00 mm
		<b>Packaging width</b>	117,00 mm
		<b>Packaging weight</b>	0,34 kg
		<b>Packaging volume</b>	1,24 dm <sup>3</sup>
		<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	80 Pcs
		<b>Packaging EAN code</b>	8015747181495
		<b>Sub-packaging length</b>	50,00 mm
		<b>Sub-packaging height</b>	44,00 mm
		<b>Sub-packaging width</b>	50,00 mm
		<b>Sub-packaging weight</b>	0,04 kg
		<b>Sub-packaging volume</b>	0,11 dm <sup>3</sup>
		<b>Sub-packaging description</b>	Plastic box
		<b>Sub-packaging quantity</b>	10 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747181631

Part number

# CIF 5 2.4



## Catalogue drawings

