

Part number

# CX 02 4BF



Female modular insert, Mixo series, screw terminal connection, 2 poles, 1 module, 40 A 1000 V 8 kV 3

| Product description                           |  | Material properties              |  |
|---|--|----------------------------------|--|
| <b>Product type</b>                           | Modular insert   | <b>Main material</b>             | Polycarbonate  |
| <b>Series</b>                                 | Mixo   | <b>Colour</b>                    | RAL 7032 grey  |
| <b>Connection type</b>                        | Screw terminal connection                                  |                                  | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>Gender</b>                                 | Female   | <b>RoHs conformity</b>           |  |
| <b>N. of poles</b>                            | 2 poles  | <b>China RoHs - EFUP</b>         | 50   |
| <b>Size</b>                                   | 1 module   | <b>REACH SVHC substances</b>     | Yes<br>Lead  |
| Technical data                                |  | <b>SCIP number</b>               | 1a9c93ff-0445-4a16-81e3-1609ac5274d6   |
| <b>Current</b>                                | 40 A   | Approvals / Standards            |  |
| <b>Voltage</b>                                | 1000 V   | <b>Reference standard</b>        | EN 61984:2009-06   |
| <b>Rated impulse withstand voltage</b>        | 8 kV   | <b>Certifications</b>            | CSA, CQC, DNV, BV, EAC   |
| <b>Pollution degree</b>                       | 3  | <b>UL</b>                        | ECBT2  |
| <b>Rated voltage according to UL/CSA</b>      | 600 V  | <b>cUL</b>                       | ECBT8  |
| <b>Wire cross-section</b>                     | 6,00 mm <sup>2</sup> - 10,00 mm <sup>2</sup>               | General ordering information     |  |
| <b>AWG size</b>                               | 10 - 8   | <b>EAN13 code</b>                | 8015747048170  |
| <b>Contact type</b>                           | Turned silver plated                                       | <b>eCl@ss 8.1</b>                | 27440205   |
| <b>IP degree of protection</b>                | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | <b>ETIM 7.0</b>                  | EC000438   |
| Further technical details                     |  | Packaging Information            |  |
| <b>Characteristics according to EN 61984</b>  | 40A 1000V 8kV 3  | <b>Packaging length</b>          | 180,00 mm  |
| <b>Insulation resistance</b>                  | ≥ 10 GΩ  | <b>Packaging height</b>          | 120,00 mm  |
| <b>Contact resistance</b>                     | ≤ 0,5 mΩ   | <b>Packaging width</b>           | 155,00 mm  |
| <b>Weight</b>                                 | 23,00 g  | <b>Packaging weight</b>          | 1,51 kg  |
| <b>Operating temperature range (min, max)</b> | -40 °C ... +125 °C   | <b>Packaging volume</b>          | 3,35 dm <sup>3</sup>   |
| <b>UL 94 flammability rating</b>              | V-0  | <b>Packaging description</b>     | Carton box   |
|   |  | <b>Packaging quantity</b>        | 60 Pcs   |
|   |  | <b>Packaging EAN code</b>        | 8015747221122  |
|   |  | <b>Sub-packaging length</b>      | 35,00 mm   |
|   |  | <b>Sub-packaging height</b>      | 40,00 mm   |
|   |  | <b>Sub-packaging width</b>       | 155,00 mm  |
|   |  | <b>Sub-packaging weight</b>      | 0,25 kg  |
|   |  | <b>Sub-packaging volume</b>      | 0,22 dm <sup>3</sup>   |
|   |  | <b>Sub-packaging description</b> | Carton tray  |
|   |  | <b>Sub-packaging quantity</b>    | 10 Pcs   |
|   |  | <b>Sub-packaging EAN barcode</b> | 8015747143677  |


Part number

# CX 02 4BF







Catalogue drawings

Catalogue drawings

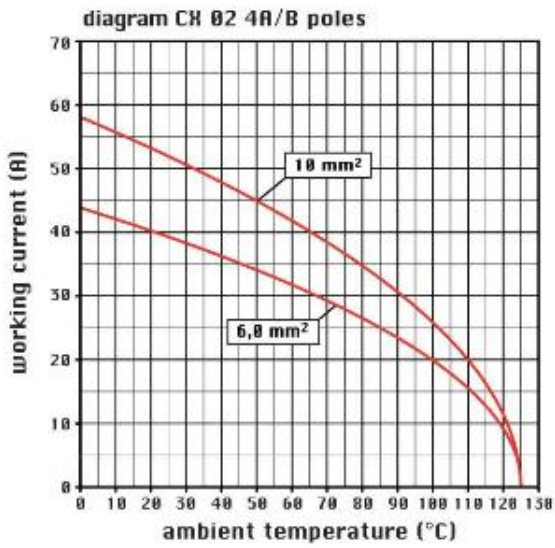

CX 02 4BM



CX 02 4BF

