

Part number

# CYFA 35



Female crimp contact, CY series, 200 A, turned silver plated, wire cross section 35 mm<sup>2</sup>, AWG 2


| Product description       |                       | Material properties              |  |
|---------------------------|-----------------------|----------------------------------|--|
| <b>Product type</b>       | Crimp contact         | <b>Main material</b>             | Copper alloy   |
| <b>Series</b>             | CY                    |                                  | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>Gender</b>             | Female                | <b>RoHs conformity</b>           |  |
| Technical data            |                       | <b>China RoHs - EFUP</b>         | 50   |
| <b>Current</b>            | 200 A                 | <b>REACH SVHC substances</b>     | Yes<br>Lead  |
| <b>Wire cross-section</b> | 35,00 mm <sup>2</sup> | <b>SCIP number</b>               | C0979fba-9907-458f-a94a-db781440f273   |
| <b>AWG size</b>           | 2                     | Approvals / Standards            |  |
| <b>Contact type</b>       | Turned silver plated  | <b>Certifications</b>            | CSA, EAC   |
| Further technical details |                       | <b>UL</b>                        | ECBT2  |
| <b>Weight</b>             | 28,50 g               | General ordering information     |  |
|                           |                       | <b>EAN13 code</b>                | 8015747168106  |
|                           |                       | <b>eCl@ss 8.1</b>                | 27440204   |
|                           |                       | <b>ETIM 7.0</b>                  | EC000796   |
|                           |                       | Packaging Information            |  |
|                           |                       | <b>Packaging length</b>          | 112,00 mm  |
|                           |                       | <b>Packaging height</b>          | 95,00 mm   |
|                           |                       | <b>Packaging width</b>           | 117,00 mm  |
|                           |                       | <b>Packaging weight</b>          | 1,32 kg  |
|                           |                       | <b>Packaging volume</b>          | 1,24 dm <sup>3</sup>   |
|                           |                       | <b>Packaging description</b>     | Carton box   |
|                           |                       | <b>Packaging quantity</b>        | 40 Pcs   |
|                           |                       | <b>Packaging EAN code</b>        | 8015747225441  |
|                           |                       | <b>Sub-packaging length</b>      | 50,00 mm   |
|                           |                       | <b>Sub-packaging height</b>      | 44,00 mm   |
|                           |                       | <b>Sub-packaging width</b>       | 50,00 mm   |
|                           |                       | <b>Sub-packaging weight</b>      | 0,17 kg  |
|                           |                       | <b>Sub-packaging volume</b>      | 0,11 dm <sup>3</sup>   |
|                           |                       | <b>Sub-packaging description</b> | Plastic box  |
|                           |                       | <b>Sub-packaging quantity</b>    | 5 Pcs  |
|                           |                       | <b>Sub-packaging EAN barcode</b> | 8015747045247  |

Part number

# CYFA 35



## Catalogue drawings

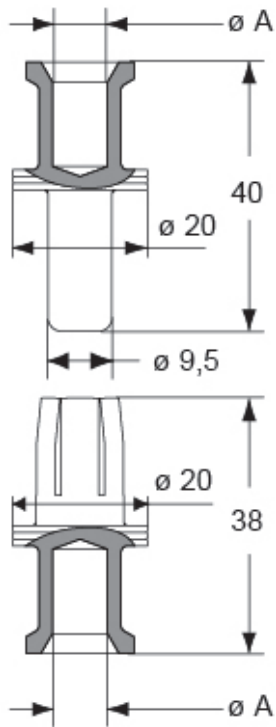

### CYF and CYM contacts

| conductor section<br>$\varnothing A$<br>(mm <sup>2</sup> ) | conductor slot<br>(mm) | conductor stripping length<br>(mm) |
|--|------------------------|------------------------------------|
| 16   | 6,1                    | 15                                 |
| 25   | 7,0                    | 15                                 |
| 35   | 8,2                    | 15                                 |
| 50   | 9,8                    | 15                                 |
| 70   | 11,8                   | 15                                 |