

Part number

# MKAX IAP20



Angled Bulkhead mounting housing, CKA series, with 1 lever, M20 cable entry, size "21.21"

| Product description                           |   | Material properties                 |                                       |
|---|---|-------------------------------------|---------------------------------------|
| <b>Product type</b>                           | Angled bulkhead mounting housing          | <b>Main material</b>                | Zinc die-cast                         |
| <b>Series</b>                                 | CKA                                       | <b>Other materials</b>              | Lever: Stainless steel<br>Gasket: TPE |
| <b>Closing type</b>                           | With 1 lever                              | <b>Colour</b>                       | RAL 7040 grey                         |
| <b>Size</b>                                   | Size "21.21"                              | <b>RoHs conformity</b>              | Compliant                             |
| <b>Cable entry</b>                            | With cable entry<br>M20                   | <b>China RoHs - EFUP</b>            | E                                     |
| <b>Technical data</b>                         |   | <b>REACH SVHC substances</b>        | No                                    |
| <b>IP degree of protection</b>                | IP44 - IP66 / IP67 / IP69 with CKR 65 (D) | <b>Approvals / Standards</b>        |                                       |
| <b>Further technical details</b>              |   | <b>UL</b>                           | ECBT2                                 |
| <b>Weight</b>                                 | 68,00 g                                   | <b>cUL</b>                          | ECBT8                                 |
| <b>Operating temperature range (min, max)</b> | -40°C...+125°C                            | <b>General ordering information</b> |                                       |
|   |   | <b>EAN13 code</b>                   | 8015747056908                         |
|   |   | <b>eCl@ss 8.1</b>                   | 27440202                              |
|   |   | <b>ETIM 7.0</b>                     | EC000437                              |
|   |   | <b>Packaging Information</b>        |                                       |
|   |   | <b>Sub-packaging length</b>         | 210,00 mm                             |
|   |   | <b>Sub-packaging height</b>         | 40,00 mm                              |
|   |   | <b>Sub-packaging width</b>          | 175,00 mm                             |
|   |   | <b>Sub-packaging weight</b>         | 0,68 kg                               |
|   |   | <b>Sub-packaging volume</b>         | 1,47 dm <sup>3</sup>                  |
|   |   | <b>Sub-packaging description</b>    | Carton box                            |
|   |   | <b>Sub-packaging quantity</b>       | 10 Pcs                                |
|   |   | <b>Sub-packaging EAN barcode</b>    | 8015747056915                         |



Part number

# MKAX IAP20




## Catalogue drawings


CKA IA




## Catalogue drawings

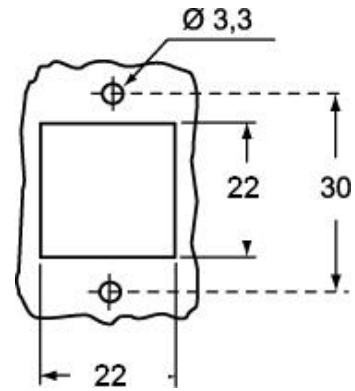

CKAX IA

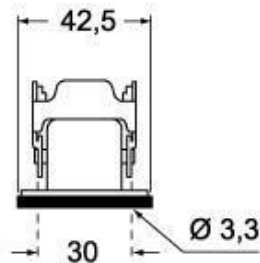

CKA IAPS (CKA APS) MKA - IAP (MKA AP)

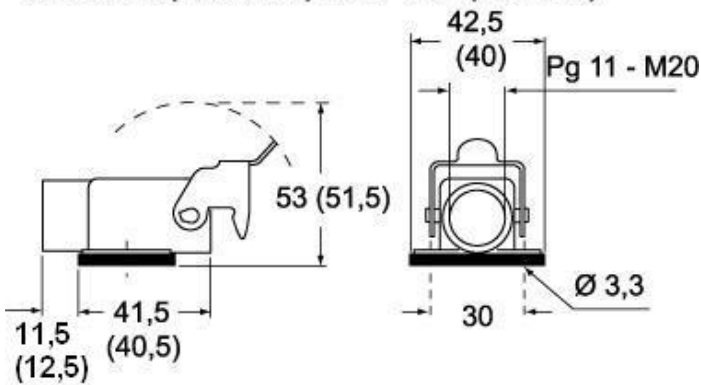

CKAX IAPS (CKAX APS) - MKAX IAP (MKAX AP)

