

Part number

# PE 1624 SI



Flush-mounting plug, PLUSO series, 3 poles + PE, 2 h (green), 16 A, > 50 V

## Product description

|                       |                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------|
| <b>Product type</b>   | Plug<br>Flush-mounting                                                                      |
| <b>Series</b>         | PE...SI, PLUSO                                                                              |
| <b>N. of poles</b>    | 3 poles +  |
| <b>Clock position</b> | 2                                                                                           |

## Technical data

|                                |        |
|--------------------------------|--------|
| <b>Current</b>                 | 16 A   |
| <b>Voltage</b>                 | > 50 V |
| <b>IP degree of protection</b> | IP44   |

## Further technical details

|                                               |                 |
|-----------------------------------------------|-----------------|
| <b>Operating temperature range (min, max)</b> | -25°C ... +40°C |
|-----------------------------------------------|-----------------|

## Material properties

|               |                               |
|---------------|-------------------------------|
| <b>Colour</b> | RAL 7035 grey, RAL 6017 green |
|---------------|-------------------------------|

## Approvals / Standards

|                           |                   |
|---------------------------|-------------------|
| <b>Reference standard</b> | EN 60309-1 and -2 |
|---------------------------|-------------------|

## General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747154697 |
|-------------------|---------------|


Part number

# PE 1624 SI



Catalogue drawings

(16 / 32A) PE ... SI

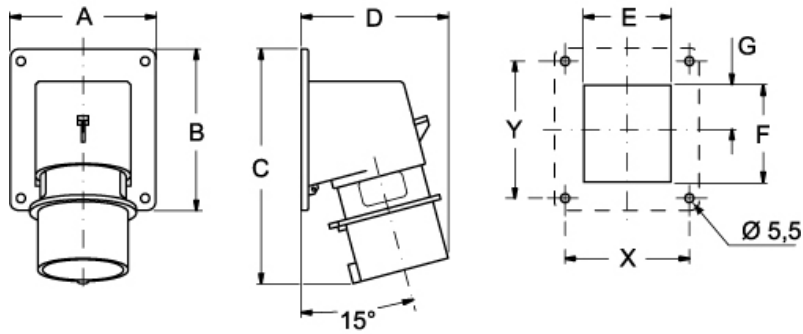

| PE ... SI  |        | A  | B   | C   | D   | E  | F  | G    | X  | Y  |
|------------|--------|----|-----|-----|-----|----|----|------|----|----|
| <b>16A</b> | 2P+⊕   | 65 | 82  | 126 | 81  | 41 | 43 | 21,5 | 52 | 60 |
|            | 3P+⊕   | 65 | 82  | 126 | 81  | 47 | 43 | 21,5 | 52 | 60 |
|            | 3P+N+⊕ | 90 | 100 | 146 | 93  | 54 | 60 | 27,5 | 77 | 85 |
| <b>32A</b> | 2P+⊕   | 90 | 100 | 160 | 101 | 55 | 60 | 27,5 | 77 | 85 |
|            | 3P+⊕   | 90 | 100 | 160 | 101 | 55 | 60 | 27,5 | 77 | 85 |
|            | 3P+N+⊕ | 90 | 100 | 160 | 106 | 62 | 60 | 27,5 | 77 | 85 |