


Part number

PE 1625 SA



Mobile plug, PLUSO series, 3 poles + N + PE, 2 h (green), 16 A, > 50 V, angled

Product description

| | |
|-----------------------|---|
| Product type | Plug Mobile |
| Series | PE...SA, PLUSO |
| N. of poles | 3 poles + N +  |
| Clock position | 2 |
| Specification | Angled |

Technical data

| | |
|--------------------------------|--------|
| Current | 16 A |
| Voltage | > 50 V |
| IP degree of protection | IP44 |

Further technical details

| | |
|---|-----------------|
| Operating temperature range (min, max) | -25°C ... +40°C |
|---|-----------------|

Material properties

| | |
|---------------|-------------------------------|
| Colour | RAL 7035 grey, RAL 6017 green |
|---------------|-------------------------------|

Approvals / Standards

| | |
|---------------------------|-------------------|
| Reference standard | EN 60309-1 and -2 |
|---------------------------|-------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747154703 |
|-------------------|---------------|


Part number

PE 1625 SA



Catalogue drawings

(16 / 32A) PE ... SA

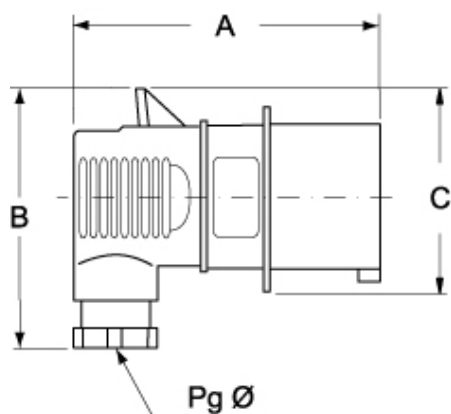

| PE...SA | A | B | C | Pg Ø |
|-----------------|-----|-----|----|------|
| 16A 2P+⊕ | 100 | 77 | 59 | 13,5 |
| 3P+⊕ | 100 | 84 | 68 | 16 |
| 3P+N+⊕ | 106 | 91 | 77 | 16 |
| 32A 2P+⊕ | 131 | 100 | 82 | 21 |
| 3P+⊕ | 131 | 100 | 82 | 21 |
| 3P+N+⊕ | 131 | 107 | 93 | 21 |