


Part number

PK 1645 EB



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 4 h (yellow), 16 A, 57/100 ÷
75/130 V, without fuse-carrier

Product description

| | |
|-----------------------|---|
| Product type | Interlocked switched socket-outlet |
| Series | PK..EB |
| N. of poles | 3 poles + N +  |
| Clock position | 4 |
| Size | 114x228 fixing plates FC xx41 TB |
| Cable entry | Pg16 |
| Specification | Without fuse-carrier |

Technical data

| | |
|--------------------------------|-------------------|
| Current | 16 A |
| Voltage | 57/100 ÷ 75/130 V |
| IP degree of protection | IP44 |

Further technical details

| | |
|--|-----------------|
| Weight | 580,00 g |
| Operating temperature range (min, max) | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK10 |

Material properties

| | |
|------------------------------|---|
| Colour | RAL 7035 grey, RAL 1021 yellow |
| RoHs conformity | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| China RoHs - EFUP | 50 |
| REACH SVHC substances | Yes Lead |
| SCIP number | Ce861c8d-b979-403b-96d9-80aef6dc281d |

Approvals / Standards

| | |
|---------------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

General ordering information

| | |
|-------------------|---------------|
| EAN13 code | 8015747080095 |
|-------------------|---------------|

Packaging Information


| | |
|----------------------------------|---------------|
| Sub-packaging weight | 0,58 kg |
| Sub-packaging description | Carton box |
| Sub-packaging quantity | 1 Pcs |
| Sub-packaging EAN barcode | 8015747080101 |

Part number

PK 1645 EB



Catalogue drawings

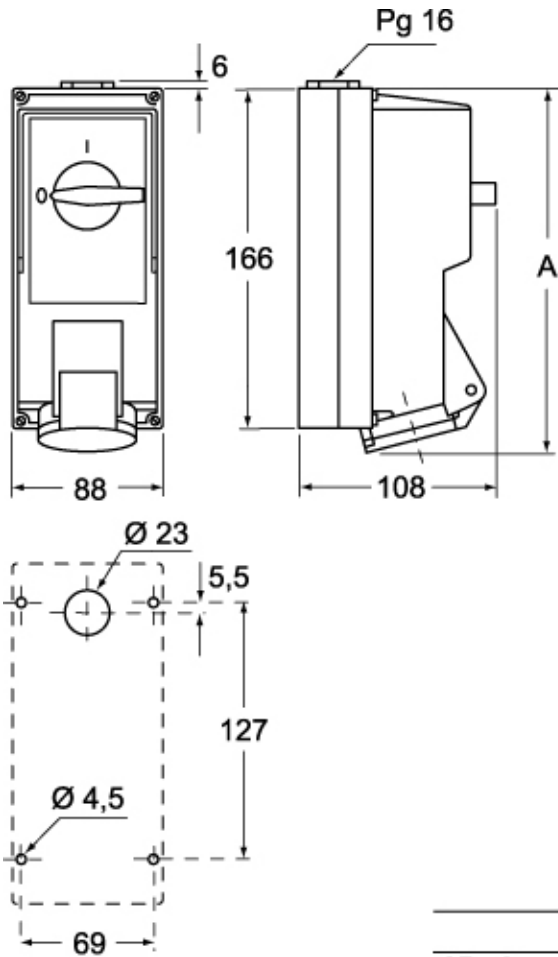

| | A |
|---------------|----------|
| 2P+⊕ | 182 |
| 3P+⊕ | 182 |
| 3P+N+⊕ | 187 |