


Part number

PK 3225 PB5



Interlocked switched socket-outlet, PK series,
3 poles + N + PE, 2 h (green), 32 A, > 50 V,
E33 - DIII fuse carrier

Product description

| | |
|-----------------------|---|
| Product type | Interlocked switched socket-outlet |
| Series | PK..PB5 |
| N. of poles | 3 poles + N +  |
| Clock position | 2 |
| Specification | E33 - DIII fuse carrier |

Technical data

| | |
|--------------------------------|--------|
| Current | 32 A |
| Voltage | > 50 V |
| IP degree of protection | IP55 |

Further technical details

| | |
|--|-----------------|
| Operating temperature range (min, max) | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK10 |

Approvals / Standards

| | |
|---------------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

General ordering information



| | |
|-------------------|---------------|
| EAN13 code | 8015747158886 |
|-------------------|---------------|

Part number

PK 3225 PB5



Catalogue drawings

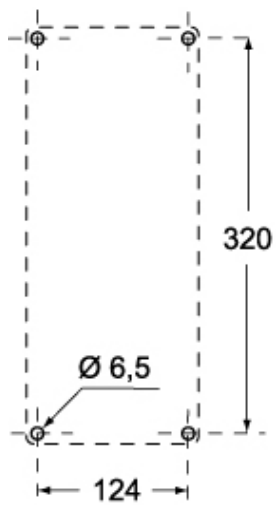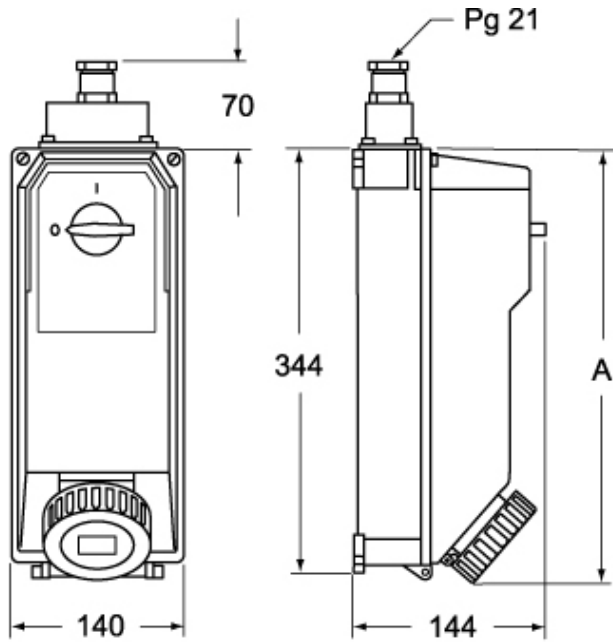

| | A |
|---------------|------------|
| 2P+⊕ | 363 |
| 3P+⊕ | 370 |
| 3P+N+⊕ | 370 |