


Part number

# SIP 3265 SV



Mobile plug, PLUSO series, 3 poles + N + PE, 6 h (red), 32 A, 200/346 ÷ 240/415 V, with phase inverter

Product description		Material properties	
<b>Product type</b>	Plug Mobile	<b>Colour</b>	RAL 7035 grey, RAL 3000 red
<b>Series</b>	SIP...SV, PLUSO	<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>Connection type</b>	Screw terminal connection	<b>China RoHs - EFUP</b>	50
<b>N. of poles</b>	3 poles + N + 	<b>REACH SVHC substances</b>	Yes Lead
<b>Clock position</b>	6	<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade
<b>Specification</b>	With phase inverter	<b>Approvals / Standards</b>	
<b>Technical data</b>		<b>Reference standard</b>	EN 60309-1 and -2
<b>Current</b>	32 A	<b>General ordering information</b>	
<b>Voltage</b>	200/346 ÷ 240/415 V	<b>EAN13 code</b>	8015747083959
<b>IP degree of protection</b>	IP44	<b>Packaging Information</b>	
<b>Further technical details</b>		<b>Packaging weight</b>	4,72 kg
<b>Weight</b>	231,00 g	<b>Packaging volume</b>	21,10 dm <sup>3</sup>
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C	<b>Packaging description</b>	Carton box
		<b>Packaging quantity</b>	20 Pcs
		<b>Packaging EAN code</b>	8015747208574


Part number

# SIP 3265 SV



Catalogue drawings

**SIP ... SV**

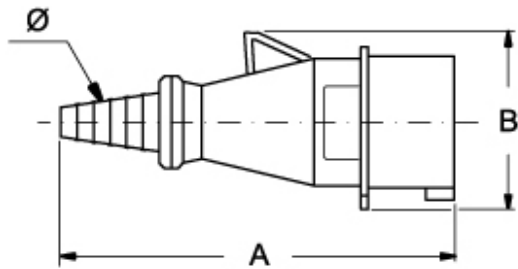


	<b>A</b>	<b>B</b>	<b>Ø min</b>	<b>Ø min</b>
<b>16A</b>	167,5	75	9	22
<b>32A</b>	192,5	87	9	22

Catalogue drawings



**SIPW ... SV**

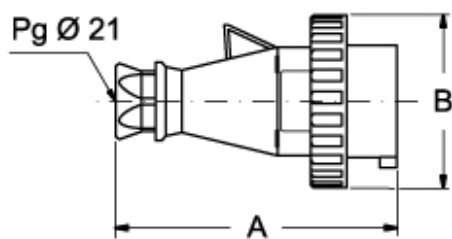

	<b>A</b>	<b>B</b>
<b>16A</b>	150	86
<b>32A</b>	175	99,5

---