

Part number

# SQE 1643.5



Interlocked switched socket-outlet, SQE series, 2 poles + PE, 4 h (yellow), 16 A, 100 ÷ 130 V, without fuse-carrier

## Product description

|                       |                                                                                             |
|-----------------------|---------------------------------------------------------------------------------------------|
| <b>Product type</b>   | Interlocked switched socket-outlet                                                          |
| <b>Series</b>         | SQE                                                                                         |
| <b>N. of poles</b>    | 2 poles +  |
| <b>Clock position</b> | 4                                                                                           |
| <b>Size</b>           | Socket fixing centre distance 88 x 230 mm                                                   |
| <b>Specification</b>  | Without fuse-carrier                                                                        |

## Technical data

|                                |             |
|--------------------------------|-------------|
| <b>Current</b>                 | 16 A        |
| <b>Voltage</b>                 | 100 ÷ 130 V |
| <b>IP degree of protection</b> | IP55        |

## Further technical details

|                                                |                 |
|------------------------------------------------|-----------------|
| <b>Weight</b>                                  | 507,00 g        |
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C |
| <b>IK rating (impact degree of protection)</b> | IK08            |

## Material properties

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| <b>Colour</b>                | RAL 7035 grey, RAL 1021 yellow                                                 |
| <b>RoHs conformity</b>       | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| <b>China RoHs - EFUP</b>     | 50                                                                             |
| <b>REACH SVHC substances</b> | Yes<br>Lead                                                                    |
| <b>SCIP number</b>           | Ce861c8d-b979-403b-96d9-80aef6dc281d                                           |

## Approvals / Standards

|                           |                     |
|---------------------------|---------------------|
| <b>Reference standard</b> | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

## General ordering information

|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747085427 |
|-------------------|---------------|

## Packaging Information


|                                  |                      |
|----------------------------------|----------------------|
| <b>Sub-packaging length</b>      | 116,00 mm            |
| <b>Sub-packaging height</b>      | 103,00 mm            |
| <b>Sub-packaging width</b>       | 230,00 mm            |
| <b>Sub-packaging weight</b>      | 0,51 kg              |
| <b>Sub-packaging volume</b>      | 2,75 dm <sup>3</sup> |
| <b>Sub-packaging description</b> | Carton box           |
| <b>Sub-packaging quantity</b>    | 1 Pcs                |
| <b>Sub-packaging EAN barcode</b> | 8015747085434        |

Part number

**SQE 1643.5**



Catalogue drawings

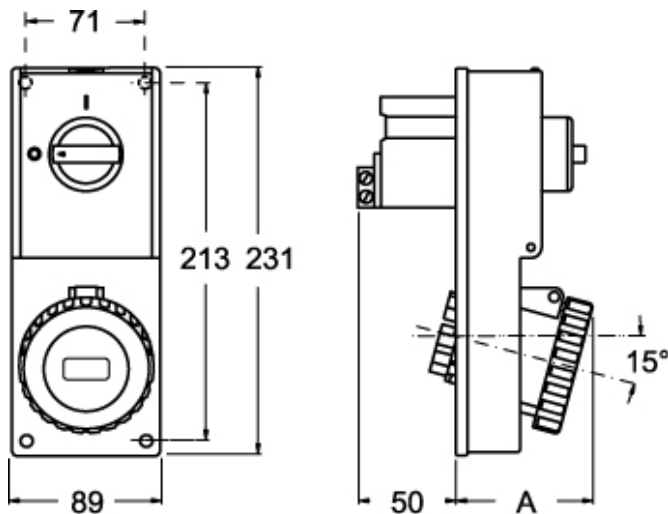

| SQE.5 |        | A  |
|-------|--------|----|
| 16A   | 2P+⊕   | 67 |
|       | 3P+⊕   | 67 |
|       | 3P+N+⊕ | 70 |

Catalogue drawings

