

Part number

# SQV 1695



Interlocked switched socket-outlet, SQV series, 3 poles + N + PE, 9 h (blue), 16 A, 120/208 ÷ 144/250 V, sectionable fuse carrier 10 x 38 mm


| Product description                     |                                                                                                 | Material properties          |                                                                                |
|-----------------------------------------|-------------------------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------|
| Product type                            | Interlocked switched socket-outlet                                                              | Colour                       | RAL 7035 grey, RAL 5015 blue                                                   |
| Series                                  | SQV                                                                                             |                              | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles                             | 3 poles + N +  | RoHs conformity              |                                                                                |
| Clock position                          | 9                                                                                               | China RoHs - EFUP            | 50                                                                             |
| Size                                    | Socket fixing centre distance 88 x 230 mm                                                       | REACH SVHC substances        | Yes                                                                            |
| Specification                           | Sectionable fuse carrier 10 x 38 mm                                                             |                              | Lead                                                                           |
| Technical data                          |                                                                                                 | SCIP number                  | F6799547-ab84-42f2-938f-233ba663766d                                           |
| Current                                 | 16 A                                                                                            | Approvals / Standards        |                                                                                |
| Voltage                                 | 120/208 ÷ 144/250 V                                                                             | Reference standard           | EN 60309-1, -2 e -4                                                            |
| IP degree of protection                 | IP44                                                                                            | General ordering information |                                                                                |
| Further technical details               |                                                                                                 | EAN13 code                   | 8015747088206                                                                  |
| Weight                                  | 572,00 g                                                                                        | Packaging Information        |                                                                                |
| Operating temperature range (min, max)  | -25°C ... +40°C                                                                                 | Sub-packaging length         | 116,00 mm                                                                      |
| IK rating (impact degree of protection) | IK08                                                                                            | Sub-packaging height         | 103,00 mm                                                                      |
|                                         |                                                                                                 | Sub-packaging width          | 230,00 mm                                                                      |
|                                         |                                                                                                 | Sub-packaging weight         | 0,57 kg                                                                        |
|                                         |                                                                                                 | Sub-packaging volume         | 2,75 dm <sup>3</sup>                                                           |
|                                         |                                                                                                 | Sub-packaging description    | Carton box                                                                     |
|                                         |                                                                                                 | Sub-packaging quantity       | 1 Pcs                                                                          |
|                                         |                                                                                                 | Sub-packaging EAN barcode    | 8015747088213                                                                  |

Part number

SQV 1695



Catalogue drawings

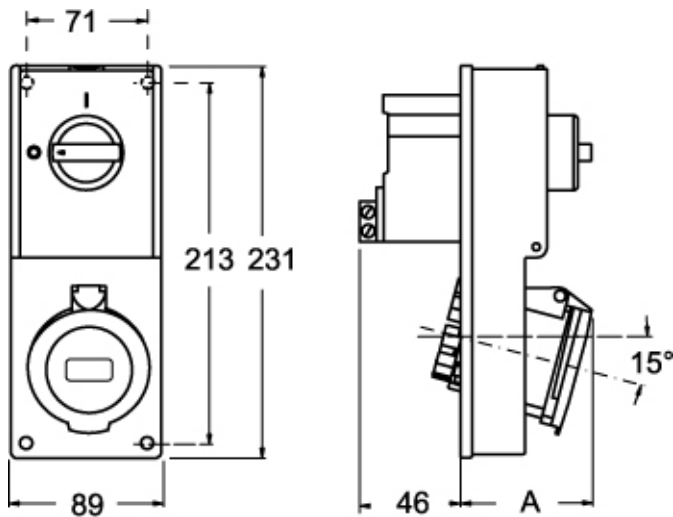

| SQV |        | A  |
|-----|--------|----|
| 16A | 2P+⊕   | 64 |
|     | 3P+⊕   | 65 |
|     | 3P+N+⊕ | 67 |

Catalogue drawings

