


Part number

# TM 16123 SIS



Interlocked switched socket-outlet, TM series,  
2 poles + PE, 12 h (white), 16 A, sectionable  
fuse carrier 10 x 38 mm, without base box

#### Product description

|                       |   |
|-----------------------|---|
| <b>Product type</b>   | Interlocked switched socket-outlet  |
| <b>Series</b>         | TM.. SIS/KSIS   |
| <b>N. of poles</b>    | 2 poles +  |
| <b>Clock position</b> | 12  |
| <b>Specification</b>  | Sectionable fuse carrier 10 x 38 mm<br>Without base box                                       |

#### Technical data

|                                |                  |
|--------------------------------|------------------|
| <b>Current</b>                 | 16 A             |
| <b>Voltage</b>                 | ins. transformer |
| <b>IP degree of protection</b> | IP66 / IP67      |

#### Further technical details

|  |                 |
|--|-----------------|
| <b>Operating temperature range (min, max)</b>  | -25°C ... +40°C |
| <b>UL 94 flammability rating</b>               | V-2             |
| <b>IK rating (impact degree of protection)</b> | IK10            |

#### Material properties

|               |                               |
|---------------|-------------------------------|
| <b>Colour</b> | RAL 7012 grey, RAL 9010 white |
|---------------|-------------------------------|

#### Approvals / Standards

|                           |                     |
|---------------------------|---------------------|
| <b>Reference standard</b> | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

#### General ordering information


|                   |               |
|-------------------|---------------|
| <b>EAN13 code</b> | 8015747160841 |
|-------------------|---------------|

Part number

# TM 16123 SIS



Catalogue drawings

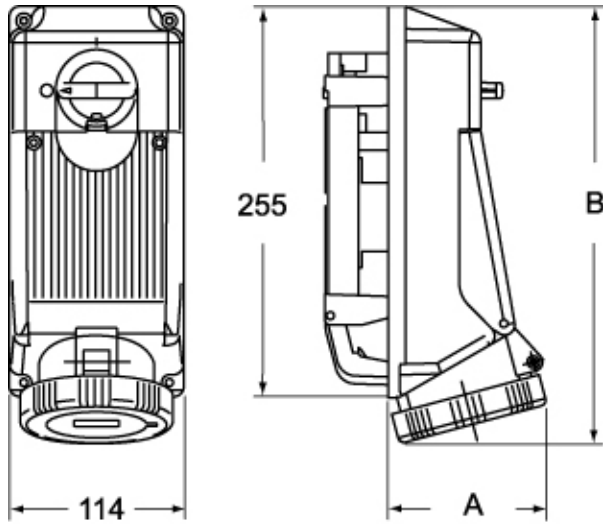

|               | <b>A</b> | <b>B</b> |
|---------------|----------|----------|
| <b>2P+⊕</b>   | 83       | 276      |
| <b>3P+⊕</b>   | 85       | 276      |
| <b>3P+N+⊕</b> | 90       | 277      |