

Part number

# TM 1694 SP



Interlocked switched socket-outlet, TM series,  
3 poles + PE, 9 h (blue), 16 A, 200 ÷ 250 V,  
without fuse-carrier, with base box



|  |                                       |                                      |  |
|--|---------------------------------------|--------------------------------------|--|
| <b>Product description</b>                         |                                       | <b>Material properties</b>           |  |
| <b>Product type</b>                                | Interlocked switched socket-outlet    | <b>Colour</b>                        | RAL 7012 grey, RAL 5015 blue   |
| <b>Series</b>                                      | TM..SP/KSP                            |                                      | Compliant with exemption<br>6(c): copper alloy containing up to 4% lead by<br>weight |
| <b>N. of poles</b>                                 | 3 poles +                             | <b>RoHs conformity</b>               | 6(c): copper alloy containing up to 4% lead by<br>weight                             |
| <b>Clock position</b>                              | 9                                     | <b>China RoHs - EFUP</b>             | 50   |
| <b>Size</b>  | 115 x 450 x 18 mm                     | <b>REACH SVHC substances</b>         | Yes<br>Lead  |
| <b>Specification</b>                               | Without fuse-carrier<br>With base box | <b>SCIP number</b>                   | Ce861c8d-b979-403b-96d9-80aef6dc281d   |
| <b>Technical data</b>                              |                                       | <b>Approvals / Standards</b>         |  |
| <b>Current</b>                                     | 16 A                                  | <b>Reference standard</b>            | EN 60309-1, -2 e -4  |
| <b>Voltage</b>                                     | 200 ÷ 250 V                           | <b>General ordering information</b>  |  |
| <b>IP degree of protection</b>                     | IP66 / IP67                           | <b>EAN13 code</b>                    | 8015747100397  |
| <b>Further technical details</b>                   |                                       | <b>Packaging Information</b>         |  |
| <b>Weight</b>                                      | 1.330,00 g                            | <b>Packaging weight</b>              | 11,97 kg   |
| <b>Operating temperature<br/>range (min, max)</b>  | -25°C ... +40°C                       | <b>Packaging volume</b>              | 52,36 dm <sup>3</sup>  |
| <b>UL 94 flammability rating</b>                   | V-2                                   | <b>Packaging description</b>         | Carton box   |
| <b>IK rating (impact degree of<br/>protection)</b> | IK10                                  | <b>Packaging quantity</b>            | 9 Pcs  |
|  |                                       | <b>Packaging EAN code</b>            | 8015747137010  |
|  |                                       | <b>Sub-packaging weight</b>          | 1,33 kg  |
|  |                                       | <b>Sub-packaging description</b>     | Plastic packaging  |
|  |                                       | <b>Sub-packaging quantity</b>        | 1 Pcs  |
|  |                                       | <b>Sub-packaging EAN<br/>barcode</b> | 8015747179065  |

Part number

# TM 1694 SP



Catalogue drawings

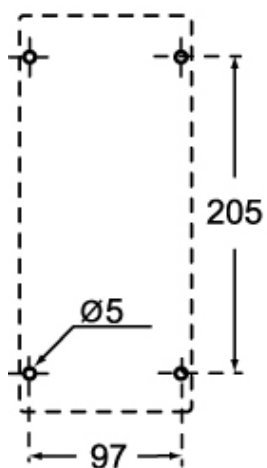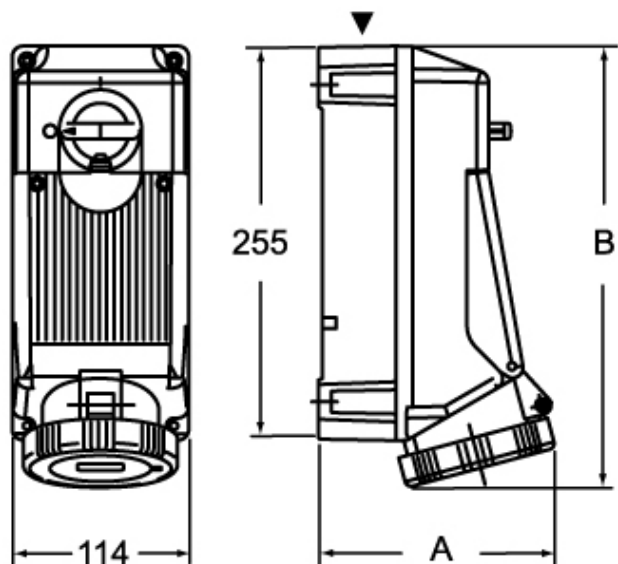

|                | A   | B   |
|----------------|-----|-----|
| 2P+ $\oplus$   | 133 | 276 |
| 3P+ $\oplus$   | 135 | 276 |
| 3P+N+ $\oplus$ | 140 | 277 |