

Part number

BK 16104



Interlocked switched socket-outlet, BK series,
3 poles + PE, 10 h (green), 16 A, > 50 V,
sectionable fuse carrier 10 x 38 mm



Product description		Material properties	
Product type	Interlocked switched socket-outlet	Colour	RAL 7035 grey, RAL 6017 green
Series	BK		Compliant with exemption
N. of poles	3 poles + 	RoHs conformity	6(c): copper alloy containing up to 4% lead by weight
Clock position	10	China RoHs - EFUP	50
Specification	Sectionable fuse carrier 10 x 38 mm	REACH SVHC substances	Yes
Technical data		Lead	
Current	16 A	SCIP number	F6799547-ab84-42f2-938f-233ba663766d
Voltage	> 50 V	Approvals / Standards	
IP degree of protection	IP67	Reference standard	EN 60309-1, -2 e -4
Further technical details		General ordering information	
Weight	1.306,00 g	EAN13 code	8015747004268
Operating temperature range (min, max)	-25°C ... +40°C	Packaging Information	
IK rating (impact degree of protection)	IK10	Sub-packaging length	116,00 mm
		Sub-packaging height	130,00 mm
		Sub-packaging width	230,00 mm
		Sub-packaging weight	1,31 kg
		Sub-packaging volume	3,47 dm ³
		Sub-packaging description	Carton box
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747004275

Part number

BK 16104



Catalogue drawings

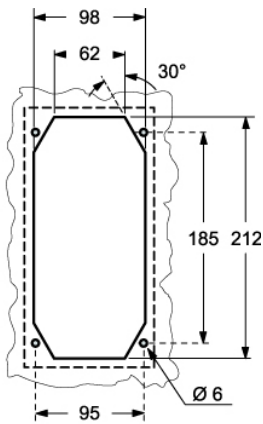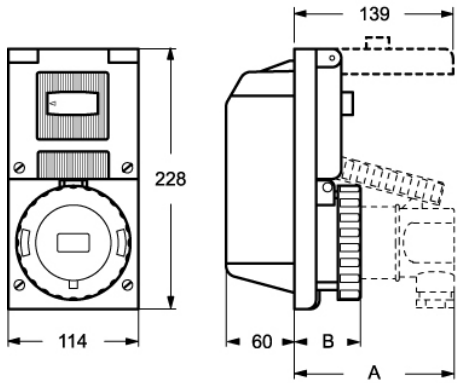

BK		A	B
16A	2P + ⊕	105	50
	3P + ⊕	105	50
	3P + N + ⊕	110	50
32A	2P + ⊕	140	58
	3P + ⊕	140	58
	3P + N + ⊕	140	58

Notes