


Part number

BK 1634



Interlocked switched socket-outlet, BK series,
3 poles + PE, 3 h (red), 16 A, 380 ÷ 380 V,
sectionable fuse carrier 10 x 38 mm

Product description

| | |
|-----------------------|---|
| Product type | Interlocked switched socket-outlet |
| Series | BK |
| N. of poles | 3 poles +  |
| Clock position | 3 |
| Specification | Sectionable fuse carrier 10 x 38 mm |

Technical data

| | |
|--------------------------------|---------------------------|
| Current | 16 A |
| Voltage | 380V (50Hz.) 440V (60Hz.) |
| IP degree of protection | IP67 |

Further technical details

| | |
|--|-----------------|
| Operating temperature range (min, max) | -25°C ... +40°C |
| IK rating (impact degree of protection) | IK10 |

Material properties

| | |
|---------------|-----------------------------|
| Colour | RAL 7035 grey, RAL 3000 red |
|---------------|-----------------------------|

Approvals / Standards

| | |
|---------------------------|---------------------|
| Reference standard | EN 60309-1, -2 e -4 |
|---------------------------|---------------------|

General ordering information


| | |
|-------------------|---------------|
| EAN13 code | 8015747147125 |
|-------------------|---------------|

Part number

BK 1634



Catalogue drawings

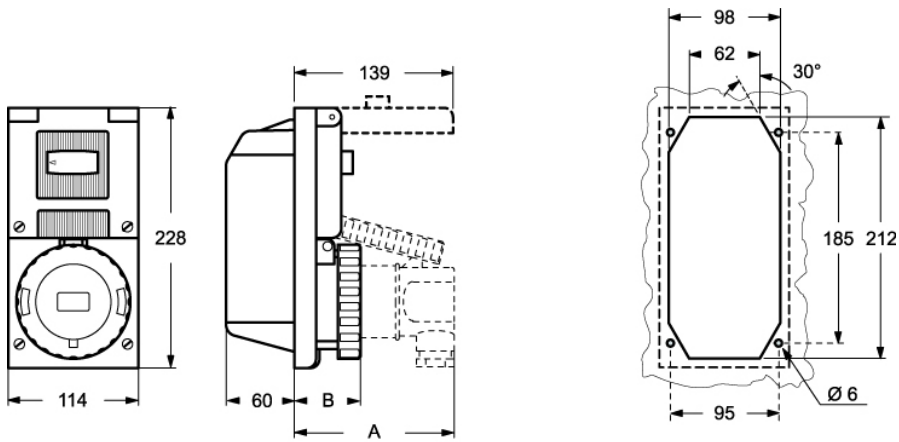

| BK | | A | B |
|-----|------------|-----|----|
| 16A | 2P + ⊕ | 105 | 50 |
| | 3P + ⊕ | 105 | 50 |
| | 3P + N + ⊕ | 110 | 50 |
| 32A | 2P + ⊕ | 140 | 58 |
| | 3P + ⊕ | 140 | 58 |
| | 3P + N + ⊕ | 140 | 58 |

Notes