


Part number

CIF 2.4 A

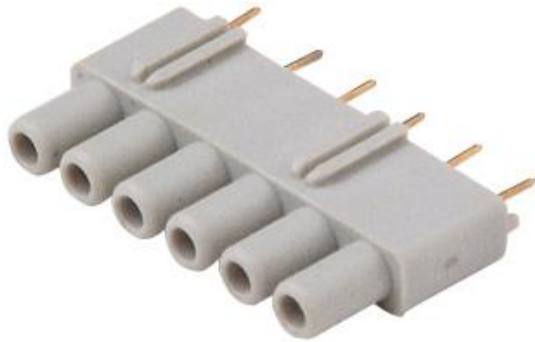

Interface for printed circuit, 6 poles, for up to 2,4 mm thick PCB

Product description

Product type	Interface for printed circuit
N. of poles	6 poles
Specification	For up to 2,4 mm thick PCB

Technical data

Current	6 A
Contact type	Turned silver plated

Further technical details

Weight	2,70 g
Operating temperature range (min, max)	-40°C...+125°C

Material properties

Main material	Polycarbonate (PC)
Other materials	Contacts: copper alloy
Colour	RAL 7032 grey
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	022a8a72-7a4c-443a-a1ad-2461ccc7884c

Approvals / Standards

Certifications	DNV
UL	ECBT2
cUL	ECBT8

General ordering information

EAN13 code	8015747140560
eCl@ss 8.1	27449290
ETIM 7.0	EC002637

Packaging Information

Packaging length	132,00 mm
Packaging height	108,00 mm
Packaging width	210,00 mm
Packaging weight	1,88 kg
Packaging volume	2,99 dm ³
Packaging description	Carton box
Packaging quantity	500 Pcs
Packaging EAN code	8015747225533
Sub-packaging length	1,00 mm
Sub-packaging height	1,00 mm
Sub-packaging width	1,00 mm
Sub-packaging weight	0,38 kg
Sub-packaging description	Plastic box
Sub-packaging quantity	100 Pcs
Sub-packaging EAN barcode	8015747140591

Part number

CIF 2.4 A



Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
