



Part number

CIF Q4/2 2.4



Interface for printed circuit, 4 poles + PE, for up to 2,4 mm thick PCB

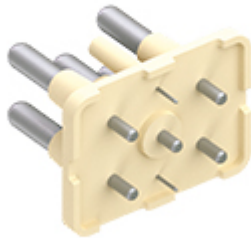


Product description		Material properties	
Product type	Interface for printed circuit	Main material	Polycarbonate (PC)
N. of poles	4 poles + 	Other materials	Contacts: copper alloy
Specification	For CQ 04/2 inserts For up to 2,4 mm thick PCB	Colour	RAL 7032 grey
Technical data		RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Current	30 A	China RoHs - EFUP	50
Voltage	400 - 690 V	REACH SVHC substances	Yes Lead
Rated impulse withstand voltage	6 kV	SCIP number	022a8a72-7a4c-443a-a1ad-2461ccc7884c
Pollution degree	2	Approvals / Standards	
Contact type	Turned silver plated	Certifications	DNV
Further technical details		UL	ECBT2
Characteristics according to EN 61984	30A 400/690V 6kV 2; 7,5A 250V 4kV 2	cUL	ECBT8
Contact resistance	≤ 3 mΩ	General ordering information	
Weight	15,00 g	EAN13 code	8015747252355
Operating temperature range (min, max)	-40°C...+125°C	eCl@ss 8.1	27449290
UL 94 flammability rating	UL 94 V-0	ETIM 7.0	EC002943
		Packaging Information	
		Packaging length	180,00 mm
		Packaging height	120,00 mm
		Packaging width	155,00 mm
		Packaging weight	1,07 kg
		Packaging volume	3,35 dm ³
		Packaging description	Carton box
		Packaging quantity	60 Pcs
		Packaging EAN code	8015747252362
		Sub-packaging length	35,00 mm
		Sub-packaging height	40,00 mm
		Sub-packaging width	155,00 mm
		Sub-packaging weight	0,18 kg
		Sub-packaging volume	0,22 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	10 Pcs
		Sub-packaging EAN barcode	8015747252379

Part number


CIF Q4/2 2.4



Catalogue drawings

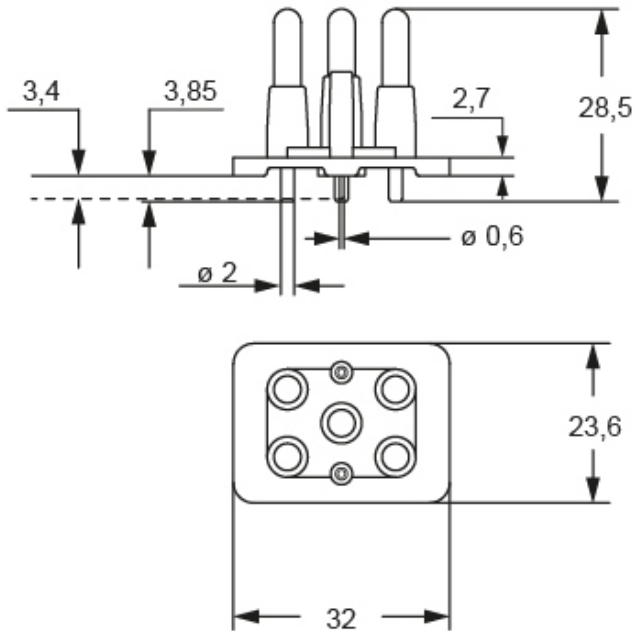

PCB-Layout

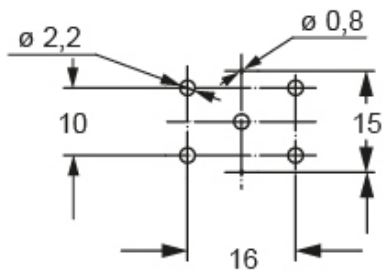

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.