



Part number

CTSEF 24 R

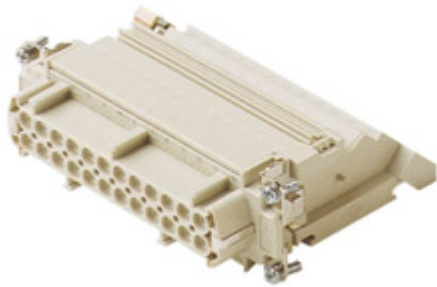

Female insert, CTSE series, spring terminal connection, 24 poles + PE, 16 A 500 V 6 kV 3, size "104.27", with incorporated terminal block, right side mounting



| Product description | | Material properties | |
|---|--|----------------------------------|--|
| Product type | Insert | Main material | Polycarbonate (PC) |
| Series | CTSE | Other materials | Contacts: copper alloy |
| Connection type | Spring terminal connection | Colour | RAL 7032 grey |
| Gender | Female | | Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight |
| N. of poles | 24 poles +  | RoHs conformity | |
| Size | Size 104.27 | China RoHs - EFUP | 50 |
| Specification | Right side mounting With incorporated terminal block | REACH SVHC substances | Yes Lead |
| Technical data | | SCIP number | 1a9c93ff-0445-4a16-81e3-1609ac5274d6 |
| Current | 16 A | Approvals / Standards | |
| Voltage | 500 V | Reference standard | EN 61984:2009-06 |
| Rated impulse withstand voltage | 6 kV | Certifications | CSAc, CQC, DNV, BV, EAC |
| Pollution degree | 3 | UL | ECB2T |
| Rated voltage according to UL/CSA | 600 V | General ordering information | |
| Wire cross-section | 0,14 mm ² - 2,50 mm ² | EAN13 code | 8015747122405 |
| AWG size | 26 - 14 | eCl@ss 8.1 | 27440205 |
| Contact type | Turned silver plated | ETIM 7.0 | EC000438 |
| IP degree of protection | IP20 without enclosure, IP66/IP69 with enclosure | Packaging Information | |
| Further technical details | | Packaging weight | 0,87 kg |
| Characteristics according to EN 61984 | 16A 500V 6kV 3; 16A 400/690V 6kV 2 | Packaging description | Carton box |
| Mating cycles | ≥ 500 | Packaging quantity | 4 Pcs |
| Insulation resistance | ≥ 10 GΩ | Packaging EAN code | 8015747123693 |
| Contact resistance | ≤ 4 mΩ | Sub-packaging length | 145,00 mm |
| Weight | 205,00 g | Sub-packaging height | 89,00 mm |
| Operating temperature range (min, max) | -40 °C ... +125 °C | Sub-packaging width | 120,00 mm |
| Conductors stripping length | 9...11 mm | Sub-packaging weight | 0,22 kg |
| UL 94 flammability rating | V-0 | Sub-packaging volume | 1,55 dm ³ |
| | | Sub-packaging description | Plastic packaging |
| | | Sub-packaging quantity | 1 Pcs |
| | | Sub-packaging EAN barcode | 8015747123709 |

Part number




CTSEF 24 R



Catalogue drawings

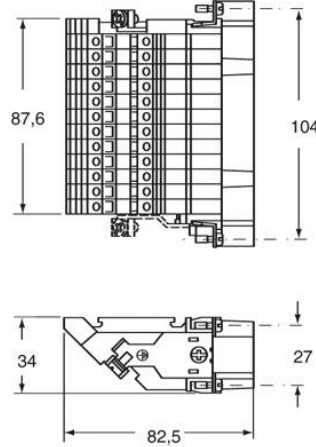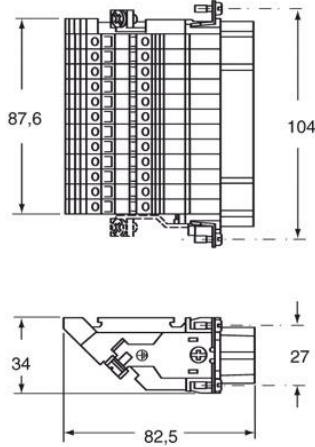

Catalogue drawings

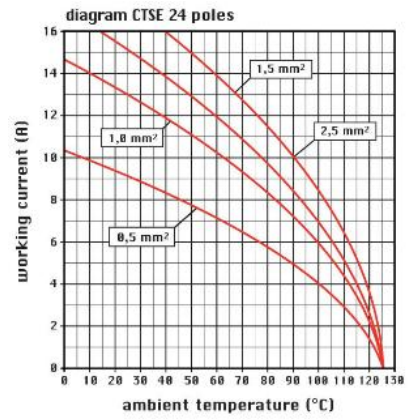

Notes

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
