

Part number

CX 08 I6F



Female modular insert, Mixo Gigabit series, crimp connection, 8 poles, 1 module, 5 A 50 V 0,8 kV 3, shielded


Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate (PC)
Series	Mixo Gigabit	Other materials	Shield: zinc alloy
Connection type	Crimp connection with shield	Colour	RAL 7032 grey
Gender	Female	RoHs conformity	Compliant
N. of poles	8 poles	China RoHs - EFUP	E
Size	1 module	REACH SVHC substances	No
Specification	Shielded	Approvals / Standards	
Technical data		Certifications	DNV
Current	5 A	UL	ECBT2
Voltage	50 V	cUL	ECBT8
Rated impulse withstand voltage	0,8 kV	General ordering information	
Pollution degree	3	EAN13 code	8015747243063
Rated voltage according to UL/CSA	50 V	eCl@ss 8.1	27440205
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	ETIM 7.0	EC000438
Further technical details		Packaging Information	
Characteristics according to EN 61984	5A 50V 0,8kV 3	Packaging weight	0,42 kg
Mating cycles	≥ 500	Packaging volume	1,24 dm ³
Insulation resistance	≥ 10 GΩ	Packaging description	Carton box
Contact resistance	≤ 4 mΩ	Packaging quantity	10 Pcs
Weight	41,50 g	Packaging EAN code	8015747243070
Operating temperature range (min, max)	-40°C ... +85°C	Sub-packaging length	116,00 mm
UL 94 flammability rating	V-0	Sub-packaging height	113,00 mm
		Sub-packaging width	142,00 mm
		Sub-packaging weight	0,04 kg
		Sub-packaging volume	1,86 dm ³
		Sub-packaging description	Plastic bag
		Sub-packaging quantity	1 Pcs
		Sub-packaging EAN barcode	8015747243087

Part number


CX 08 I6F



Catalogue drawings

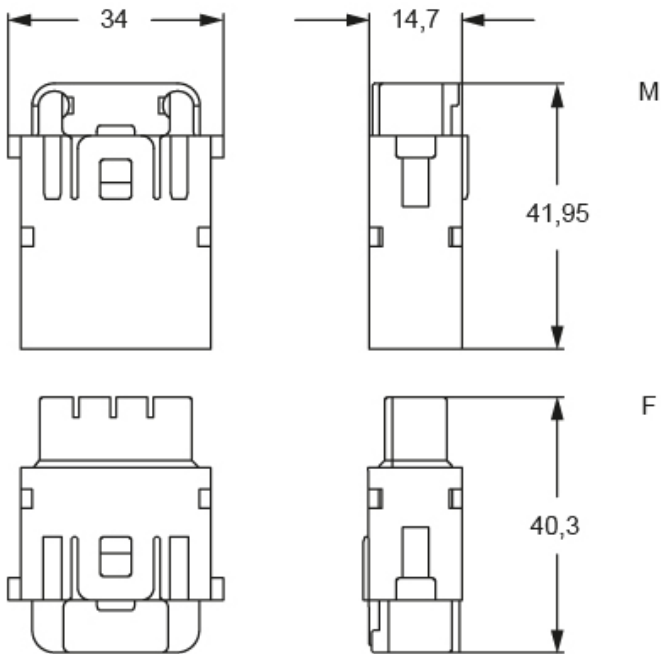

contacts side (front view)
side with reference arrow ▲

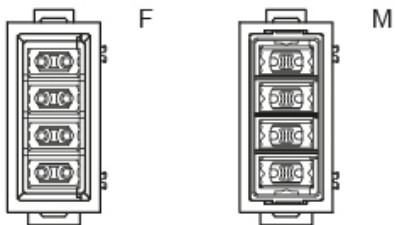

- 1 frame slot

Notes